

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 818 940 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
14.01.1998 Bulletin 1998/03

(51) Int. Cl.⁶: H04Q 11/04, H04L 12/437

(21) Application number: 97111631.4

(22) Date of filing: 09.07.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV RO SI

(30) Priority: 11.07.1996 US 21575 P
16.01.1997 US 783869

(71) Applicant:
NORTHERN TELECOM LIMITED
Montreal, Quebec H2Y 3Y4 (CA)

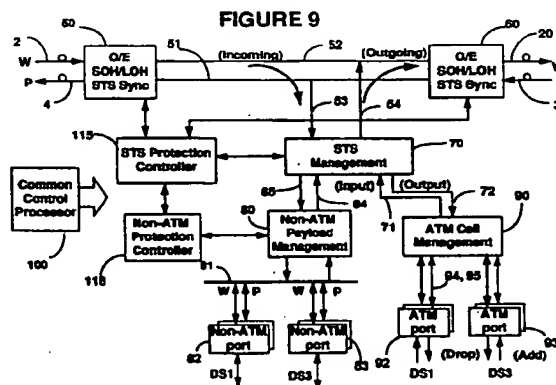
(72) Inventors:
• Ellis, Donald Russell
Ottawa, Ontario K2C 2P6 (CA)

• Allen, Brent E.
Nepean, Ontario K2G 6A4 (CA)
• Martin, David Wright
Nepean, Ontario K2J 1R3 (CA)
• Sokolowski, Edward Ryszard
Ontario K2L 2E3 (CA)
• McEachern, Patrick M.
Nepean, Ontario K2J 4C1 (CA)

(74) Representative:
Berkson, Michael David et al
Nortel Patents,
London Road
Harlow, Essex CM17 9NA (GB)

(54) Self-healing line switched ring for ATM traffic

(57) The invention provides for a method for transporting a SONET/SDH formatted asynchronous transfer mode (ATM) signal and/or a synchronous transfer mode (STM) signal on a line switched ring over a unidirectional path. The SONET formatted ATM signal comprises cells mapped into a STS-Mc or $m \times$ STS-1s while the STM signal comprises STS-1s/VTs mapped STS-W. A unidirectional line switched ring is provided for transporting the STM STS-W using a unidirectional path switched protection protocol and the ATM STS-Mc using a unidirectional line switched protection protocol. A ring node comprises input and output ring interfaces, an STS management block, an ATM cell management block, and a non-ATM payload management block. The STS management block routes the traffic to the ATM cell management block and to the non-ATM payload management block, according to the traffic type. The STS management block also provides the UPSR protection for the STS-1s and ULSR protection for the STS-Mc. The ATM cell management block maps the add ATM cells received from the ATM ports into the STS-Mc signal, and delineates the cells from the STS-Mc to present them to the ATM ports. The non-ATM payload management block routes STM VTs or STS-1s to/from the non-ATM ports.



EP 0 818 940 A2

Description

Field of the Invention

The invention is directed to a line switched ring for carrying asynchronous transfer mode (ATM) traffic or mixed ATM and synchronous transfer mode (STM) traffic for standardized communication of multimedia information, and more particularly to a self-healing line switched ring using a unidirectional path for ATM traffic.

Background of The Invention

The synchronous optical network (SONET) is a standard for a synchronous telecommunication signal used for optical transmission, based on the synchronous digital hierarchy (SDH). SONET is a physical carrier technology, which can provide a transport service for ATM, SMDS, frame relay, T1, E1, etc. As well, SONET provides the ability to combine and consolidate traffic from different locations through one facility (grooming), and reduces the amount of back-to-back multiplexing. More importantly, network providers can reduce the operation cost of their transmission network by using the notably improved operation, administration, maintenance and provisioning (OAM&P) features of SONET.

The SONET standards ANSI T1.105 and Bellcore GR-253-CORE, define the physical interface, optical line rates known as optical carrier (OC) signals, a frame format, and an OAM&P protocol. The user signals are converted into a standard electrical format called the synchronous transport signal (STS), which is the equivalent of the optical signal. The STS-1 frame consists of 90 columns by 9 rows of bytes, the frame length is 125 microseconds. As such, an STS-1 has a bit rate of 51.840 Mb/s. Higher rates (STS-N, STS-Nc) are built from this one, and lower rates are subsets of this. The lower rate components, known as virtual tributaries (VT), allow SONET to transport rates below DS3.

Requests and acknowledgements for protection actions are transmitted in the APS bytes in the SONET overhead, i.e. K1 and K2 bytes. The K1 byte communicates a request for a switch action. The first four bits of K1 indicate the switch request priority and the last four indicate the destination ring node identification (ID). The K2 byte indicates an acknowledgement of the requested protection switch action. The first four bits of K2 indicate the source ring node ID and the last four bits indicate the action taken by that node.

A SONET add/drop multiplexer multiplexes various STS-formatted input streams onto optical fiber channels. The STS signals are carried by an optical carrier, which is defined according to the STS that it carries. Thus, an STS-192 signal is carried by an OC-192 optical signal.

The topology of the SONET network can be a linear point-to-point configuration, or a ring configuration.

A linear topology can only protect against single fiber link failures. A "1:1" linear system has an equal number of working and protection links; a "1:N" linear system has N working channels and one shared protection channel.

Lately, rings have become the topology of choice in fiber deployment. The prime motivator for rings versus linear transport is higher survivability. A ring protects against simultaneous failure of the protection and working fibers (i.e. cable cuts) and saves intra-ring and inter-ring pass-through traffic during node failure/isolation. Rings offer cost effective transport while delivering enhanced network survivability.

Currently, two types of rings are used, namely, unidirectional path switched rings (UPSR), and bidirectional line switched rings (BLSR). The UPSRs are currently used in access networks and therefore they are built for lower rates, such as OC-3, which are sufficient for access link demands. UPSR protection switching is done at the SONET path level. The operation of UPSRs is standardized by the BellCore GR-1400-CORE standard, and there are OC-3/12 rate products available.

The BLSR are currently used in the backbone networks and therefore they are built for higher rates such as OC-48. Switching is done at the SONET line layer. The operation of BLSRs is standardized by the BellCore GR-1230-CORE standard, and there are OC-12/48 rate products available.

The asynchronous transfer mode (ATM) forms the basis for switching in broadband networks. ATM convergence functions permit switching of voice, video and data traffic through the same switching fabric. It multiplexes user information into fixed lengths cells of 53 bytes, with 5 bytes forming a header.

With the constant growing needs for enhanced services in information transmission networks, more efficient transport for bursty traffic carried in ATM cells is needed. There is also a need to simplify and standardize the access link while also obtaining protection of the access traffic. Current practice is to dedicate an entire facility to these new services, such as one STS-1 per customer, where the entire payload is cell based.

While synchronous transfer mode (STM) access traffic can be advantageously carried on a UPSR, there are disadvantages for ATM traffic. To carry ATM traffic and have the transport vehicle benefit from, and not restrict the bandwidth on demand feature that ATM can provide, the optimum approach is to share a large block of bandwidth between nodes around the ring. In this way, a virtual path (VP) added at a node uses the bandwidth it needs within the large block, rather than using, say, a virtual tributary (VT) where its burst rate will be significantly limited. The shared bandwidth block could be an STS-Nc, where N=1, 3, 6, or higher rates.

This assumes a UPSR with an STS-Nc granularity selector at the tail-ends. With an STS-Nc passing around the UPSR from node to node, the ring bandwidth is quickly exhausted, as each node must source the STS-Nc in different timeslots in order to leave protection timeslots available for other nodes. The UPSR could, in theory, reuse the same working timeslots for the STS-Nc between nodes by operating unprotected and leaving protection to the ATM layer. However, no standardized scheme yet exists at the ATM layer which can provide the 60 ms protection speeds typical of SONET. It is apparent that the two goals of bandwidth efficiency and SONET protection are mutually exclusive in the context of ATM traffic on a UPSR.

A BLSR can carry an STS-Nc node to node in a bandwidth efficient manner. As well, the BLSR can protect any service type since it switches at the line layer. However, the BLSR is not an economical solution for ATM access. This is because for an OC-3 line rate ring, a two-fiber BLSR (2F-BLSR) is not realizable and four-fiber BLSRs (4F-BLSR) are currently not available at the OC-3 rate. An OC-3 4F-BLSR, if it becomes available, would carry twice the bandwidth of an OC-3 UPSR, but almost doubles the cost of the fiber and equipment required, and would therefore be uneconomical for the majority of access applications. Similarly, an OC-12 UPSR or 2F-BLSR, which is typically the next step in upgrading an access applications, carries four times the bandwidth of an OC-3 UPSR, but again, at greater than double the OC-3 cost.

Due to the working timeslot reuse capability, a BLSR always provides the optimum use of bandwidth for a given traffic pattern. However, a complex automatic protection switching (APS) protocol is necessary, which results in longer switching times than for a UPSR. In addition, protection is not optional on a per-path basis. It is also to be noted that for a bidirectional homing traffic pattern typical of the access network, a UPSR is as bandwidth efficient as a BLSR. For a mesh traffic pattern typical of the backbone network, a BLSR is more bandwidth efficient.

In addition, regardless of the line rate or 2F/4F type, a BLSR must perform the ATM add/drop functionality for two bidirectional channels (e.g. east and west). ATM chip sets available today are designed for terminals, or a single bidirectional channel (e.g. east or west). It is expected that the evolution to ATM chips consolidating add/drop functionality for two bidirectional channels will be eventually available, but again at higher costs.

In conclusion, there is no standardized survivable access vehicle currently available which can efficiently carry ATM or mixed ATM/STM traffic.

Summary of the Invention

The invention provides a novel type of ring for ATM and mixed ATM/non-ATM traffic, employing the UPSR protocol for non-ATM traffic and a new protocol for ATM traffic.

For non-ATM access traffic, the UPSR provides a simple protection protocol, is bandwidth efficient and works well with path based planning tools used in access. Protection can be optional on a per-path basis. In addition, the UPSR has a fast protection time.

For ATM access traffic, none of the existing rings, UPSR or BLSR, satisfies the goals of bandwidth efficiency, SONET protection and economy. The UPSR, predominant in the access network, could carry ATM traffic and be bandwidth efficient but without protection by SONET. If SONET protection is implemented for ATM traffic on the UPSR, bandwidth utilization becomes inefficient. A BLSR could carry ATM traffic, be bandwidth efficient and provide SONET protection. However, the cost of providing such a product is high for an access application. Also, there are no BLSR products possible for 2F or available for 4F at the OC-3 rate, which is currently the predominate rate in the access network.

According to this invention, ATM access traffic is carried over a unidirectional path using a line switched ring. The unidirectional line switched ring (ULSR) of this invention can be implemented at any line rate, including for example an OC-3 line rate, and at costs lower than for BLSR rings. The ULSR provides a unidirectional traffic flow for both ATM and non-ATM traffic, which allows for traffic management and operation commonality. A ULSR is as bandwidth efficient as a BLSR or UPSR for homing traffic. Further, a VP in a ULSR could burst up to the STS-N rate, rather than the STS-N/2 limitation with a 2F-BLSR.

The ULSR is not currently defined by standards and no SONET products of this type are available.

According to a particular aspect of this invention, a BLSR at a high line rate, such as for example OC-12/48/192, may be used to carry symmetrical ATM traffic in one direction around the ring and, for example, a TV broadcast in the other direction.

It is an object of the present invention to provide a self-healing line switched fiber optic ring to efficiently carry ATM or mixed non-ATM and ATM traffic over a unidirectional path, using SONET technology. The ring is primarily for use in an access network, but it can also be used in a backbone network.

Another object of the invention is to provide a switched ring for carrying ATM traffic with STS-Nc granularity, and non-ATM traffic with VT and/or STS-1 granularity. Thus, the ring of the invention provides a single vehicle for carrying both non-ATM and ATM traffic at all nodes on the ring. Since the ring is unidirectional, like a UPSR, management of the non-ATM traffic would be necessary.

Another object of this invention is to provide a method for using a BLSR or a unidirectional line switched ring (ULSR) for bidirectional traffic via unidirectional transport around the ring. This structure preserves the bidirectional nature of the service at the interfaces, however, it offers cost advantages in the design of the transport layer ring ADMs. The control of the cell add/drop function is implemented such that the cell transport function operates as a physically distributed switch. For an access application with homing traffic, the ring provides the grooming and consolidation of cells between the customer access and the ATM edge switch.

Accordingly, the invention comprises a method for communicating information over a SONET/SDH line switched ring having a plurality (K) of communication terminals connected to a first and a second transmission line, comprising the steps of at each terminal (k), inserting an outgoing signal onto the first transmission line along a first direction of transmission defined from the terminal (k), towards an adjacent terminal (k+1), wherein (k) is an integer between 1 and (K) giving the sequential position of the node (k) in the ring; at each the terminal (k), receiving an incoming signal over the first transmission line from an adjacent terminal (k-1), along the first direction of transmission; and operating the plurality of communication terminals according to a unidirectional protection protocol upon detection of a failure condition in the incoming signal.

The invention further comprises a method for transporting a SONET/SDH formatted asynchronous transfer mode (ATM) signal on a unidirectional line switched ring comprising the steps of connecting a plurality (K) of nodes in a ring network provided with a working transmission line associated with the first direction of transmission and a protection transmission line associated with a second direction of transmission, opposite to the first direction; detecting at a node (k) an error signal received from a node (k-1) located adjacent to the node (k) and upstream with respect to the first direction; at the node (k), generating a status change request upon receipt of the error signal, and transmitting the status change request on the working and protection transmission line; and restructuring all the nodes of the ring to operate according to one of a working transmission line failure (WTLF), a node failure (NF), a protection transmission line failure (PTLF), and a working and protection transmission line failure (WPTLF) configuration, upon receipt of the status change request.

The invention further comprises a method for communicating information on a bidirectional line switched ring (BLSR) configuration including a plurality (K) of ring nodes connected by a first and a second transmission line, comprising the steps of deploying the BLSR in a homing-type configuration, each node (k) having an incoming path associated with a node drop direction and an outgoing path associated with a node add direction: at a first node (q) where $q \neq k$ of the BLSR, transmitting a first SONET/SDH formatted signal along the first transmission line, the first SONET/SDH formatted signal having a bandwidth $K \times BW$; at each node (k) of the BLSR, receiving the first SONET/SDH formatted signal from the first transmission line, extracting same over a respective incoming path, and re-transmitting the first SONET/SDH formatted signal over a respective outgoing path back into the first transmission line; at each the node (k), inserting a respective outgoing SONET/SDH formatted signal into the second transmission line over the respective outgoing path, each outgoing SONET/SDH formatted signal comprising traffic formatted at a respective node (k), and having a bandwidth BW; and at each the node (k), extracting a respective incoming SONET/SDH formatted signal received from the second transmission line over the respective incoming path, each incoming SONET/SDH formatted signal comprising traffic addressed to the respective node (k), and having the bandwidth BW.

The invention further comprises a node for a SONET/SDH line switched ring comprising a first ring interface with a first working port for receiving an incoming optical signal OC-Mc from a working fiber associated with a first direction of transmission, and converting same into an incoming STS-Mc; a second ring interface with a second working port for converting an outgoing STS-Mc into an outgoing optical signal OC-Mc and transmitting same over the working fiber; an ATM cell management block for routing an output ATM cell extracted from the incoming STS-Mc as one of a drop ATM cell and a passthrough ATM cell, and multiplexing the passthrough ATM cell and an add ATM cell into the outgoing STS-Mc; and an STS management block for routing the incoming STS-Mc between the first ring interface and the ATM cell management block, and the outgoing STS-Mc between the ATM cell management block and the second ring interface.

The invention further comprises a node for a SONET/SDH line switched ring comprising a first ring interface with a first working port for receiving a SONET/SDH formatted incoming optical signal from a working fiber associated with a first direction of transmission, and converting same into an incoming non-ATM signal and an incoming ATM signal; a second ring interface with a second working port for converting an outgoing non-ATM signal and an outgoing ATM signal into an outgoing SONET/SDH formatted optical signal and transmitting same over the working fiber; an ATM cell management block for processing and transmitting an output ATM cell extracted from the incoming ATM signal as one of a drop ATM cell and a passthrough ATM cell, and multiplexing the passthrough ATM cell and an add ATM cell into the outgoing ATM signal; an STS management block for routing the incoming non-ATM signals as one of an output non-ATM signal and a passthrough non-ATM signal, routing the passthrough non-ATM signal and an input non-ATM signal as the outgoing non-ATM signal and routing the incoming and outgoing ATM signals between the first and the second ring interfaces and the ATM cell management block; and a non-ATM payload management for processing and transmitting the output non-ATM signal to a non-ATM port, and for processing and transmitting the outgoing non-ATM signal to the STS management block.

Advantageously, the ring according to this invention equals the bandwidth efficiency of a BLSR for homing traffic and provides SONET protection while overcoming cost concerns. A VP could burst up to a ring line rate N, whereas in a 2F-BLSR the burst rate would be limited to a STS-N/2 rate. In some cases, the unidirectional add/drop feature of the ring of the invention may offer twice the bandwidth for access rings, while offering protection for the traffic in the standard manner. Thus, if for example, a standard BLSR can carry a STM STS-6 in one direction and two ATM STS-3c in the other direction, the ring of the present invention can carry in addition two STS-3s of video, which travel in a drop-and-continue fashion.

Since the ring provides the same unidirectional traffic flow for both ATM and non-ATM traffic, traffic management commonality may be obtained.

Still another advantage of this new type of ring is that minimum changes to the BellCore GR-1230-CORE standard would be required to accommodate the ULSR APS protocol for protection of ATM traffic.

Brief Description of the Drawings

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of the preferred embodiments, as illustrated in the appended drawings, where:

Figure 1 illustrates the applicable OSI layers for ATM and SONET;

Figure 2A shows a simple ATM configuration;

Figure 2B shows a simple SONET configuration;

Figure 3A is a block diagram of a unidirectional path switched ring (UPSR) in normal operation;

Figure 3B is a block diagram of a UPSR showing protection actions during a cable cut;

Figure 4A is a block diagram of a 2F-BLSR in normal operation;

Figure 4B is a block diagram of a 2F-BLSR showing protection actions during a cable cut;

Figure 5A is a block diagram of a unidirectional line switched ring (ULSR) of this invention, in normal operation;

Figure 5B is a block diagram of a ULSR showing protection actions during a cable cut;

Figure 6A shows a ULSR node in the idle state;

Figure 6B shows a ULSR node in the passthrough and full passthrough state;

Figure 6C shows a ULSR node in the bridged state;

Figure 6D shows a ULSR node in the switched state;

Figure 7 is a flow-chart for operation of the ULSR ring when the working or/and protection fiber(s) is/are interrupted;

Figure 8 illustrates an example of a STS-3c signal formed with mixed ATM and STM traffic;

Figure 9 illustrates a block diagram of a node according to this invention;

Figure 10 is a block diagram of the ATM cell management block of the node illustrated in Figure 9;

Figure 11 is a flow-chart illustrating the squelching scheme for the switched ring of Figures 5A and 5B;

Figure 12 shows an example of the ring of the invention connected in an access level transmission network;

Figure 13A shows the transport of ATM traffic according to this invention on a prior art BLSR; and

Figure 13B shows the transport of ATM traffic on a unidirectional channel using the BLSR of Figure 13A.

Description of the Preferred Embodiment

Figures 1, 2, 3A, 3B, 4A and 4B are provided for defining and illustrating some of the terms necessary for describing the present invention and its mode of operation.

Figure 1 shows the relationship between the ATM layer and the SONET physical layer. The physical layer for ATM can be made up of a SONET carrier and the ATM operations are transparent to SONET.

Figure 2A shows a basic linear ATM configuration, illustrating a typical point-to-point ATM topology, where the connections are identified through virtual channel identifiers (VCI) and virtual path identifiers (VPI) in the ATM cell header. A virtual channel connection (VCC) 200 has end-to-end significance between end users A and B. Switching in the ATM network is illustrated at 211, 212, and 213. A virtual path connection (VPC) has significance between adjacent ATM devices, as illustrated at 221, 222, 223, and 224. From an input port, a cell with a given VPI/VCI is mapped to an output port and assigned a potentially different VPI/VCI.

Switching is performed very quickly through the use of a routing table. ATM switches are available today with a total switching capacity in the order of Gb/s. The virtual channels (VC) and virtual paths (VP) of ATM run on the SONET physical layer, as shown in Figure 1.

Figure 2B shows a basic linear SONET configuration illustrating some SONET terms. The physical layer of SONET is modelled on three major entities: transmission path, multiplex section and regenerator section, each layer requiring the services of all lower layers to perform its own function. These layers correspond to SONET path, line and section

layers shown in Figure 1.

The section layer deals with the transport of multiplexed signals across a physical medium. A section is a portion of the transmission facility between two section terminating equipments (STE), such as regenerators and terminals. Functions include adding the section level overhead (SOH), framing, scrambling, section error monitoring and an embedded communication channel. Figure 2B shows three sections, each defined between two successive STEs, namely, section 301 between terminal 320 and regenerator 330, section 302 between regenerator 330 and add-drop multiplexer 350, and section 303 between add-drop multiplexer 350 and terminal 360.

The line layer provides synchronization and multiplexing for the path layer. A line is a portion of the transmission facility between two consecutive line terminating equipments (LTE). The LTEs could be add-drop multiplexers or terminals (TM). An ADM can multiplex/demultiplex various inputs from an optical signal. It accesses signals that need to be dropped or inserted at that site, the rest of the traffic continuing straight through. Figure 2B illustrates line 304 between terminal 320 and ADM 350, and line 305 between ADM 350 and terminal 360.

The path layer deals with the transport of services, such as DS1 or DS3, between path terminating equipments (PTE). The PTE could be ADMs or terminals serving routers, bridges, PBXs or switches. The main function of the path layer is to map the services and path overhead (POH) into STS-1s, which is the format required by the line layer. Figure 2B shows a path 306 of a DS-3 mapped STS-1 which originates at terminal 320 and is delivered at terminal 360. In another example, the circuit between terminals 320 and 350 transports an OC-12 signal, with DS-1s being added at nodes 370 and 380 to form the OC-12, in which case path 307 does not start or begin at nodes 320 and 350, but at nodes 370 and 380. The DS-1s are transported in VT1.5s from terminal 370 to terminal 380 on path 308.

A fourth layer, not illustrated, is the physical medium layer. It is the basic physical layer that provides optical transmission at a given bit rate. Issues dealt with at this layer include optical pulse shape, power levels, and wavelength. Electro-optical units communicate at this level.

In this specification, the term "normal operation conditions" defines the operation of the ring of the present invention when the traffic between the ring nodes is directed along the working fiber and the protection fiber is idle, or used for lower priority extra-traffic (ET). The term "failure operation conditions" defines the operation of the ring when the connection between some ring nodes is interrupted due to a cable cut or a node failure. The terms "unidirectional" and "bidirectional" protection switching refer to modes of the protection protocol and should not be confused with the terms "unidirectional" and "bidirectional" connections. The term "transmission line" refers to the physical medium that connects two terminals, which is fiber optics in the following examples.

The term "line switched ring configuration" defines a ring where the protection switching is done at the SONET line level, while the term "path switched ring configuration" defines a ring where the protection switching is done at the SONET path level. These terms are explained next in further detail in connection with Figures 3A, 3B, 4A and 4B.

Figures 3A and 3B illustrate an example of a UPSR with six nodes (PTEs) and Figures 4A and 4B shows a BLSR with six nodes (LTEs).

The UPSR shown in Figure 3A interconnects ADMs A, B, C, D, E, and F along working fiber (W), in a clockwise direction, and ADMs A, F, E, D, C, and B along protection fiber (P) in a counter-clockwise direction. The working fiber (W) between ADMs A and D has been denoted with numeral 1, while the working fiber between D and A has been denoted with 2. The protection fiber (P) between A and D is denoted with 4 and the protection fiber between D and A is denoted with 3.

The AD signal normally travels on working fiber 1 in the direction illustrated by arrow 5. The DA signal normally travels on working fiber 2 in the direction illustrated by arrow 5'. The ring provides a permanent head-end bridge at path layer for VTs and STSs, as illustrated at ADMs A and D by numerals 6 and 7. The switches at the tail-ends 8 and 9 are connected to the working fiber 2 and 1 respectively, such that the traffic AD from ADM A exits at ADM D and the traffic DA from ADM D exits at ADM A. Note that this is a bidirectional connection, yet the traffic flow is unidirectional.

If fibers 2 and 4 are cut as shown in Figure 3B, the traffic on working fiber 2 is interrupted. Switch 8 at ADM A switches to the protection fiber once ADM A determines that the signal on fiber 3 is of a better quality than the signal on working fiber 2. Now the traffic DA flows on protection fiber 3, as shown by arrow 5', and exits at ADM A through switch 8. Switch 9 at ADM D remains unchanged, and the traffic from ADM A to ADM D continues to flow along working fiber 1.

With this type of ring, the signal is always present on both working and protection fibers and no tail-to-head signaling is necessary; only tail-end switching is required. This results in fast switching times. A primary disadvantage of this type of ring, however, is that the protection fiber cannot be used to carry extra-traffic (ET).

Figure 4A shows a two-fiber (2F) BLSR which is currently used in the backbone transport link. The ring nodes comprise line terminating equipment (LTE), and the switching is done at the line level. Since the ring is bidirectional, both fibers between the nodes are used for the working traffic. For a 2F-BLSR, the same fibers must also have protection capacity allocated within them.

Under normal conditions, shown in Figure 4A, bidirectional traffic between ADMs A and D takes place in the working time-slots on fibers 2 and 4. Fibers 1 and 3 are also available for additional traffic between ADMs A and D. Node A

and node D are connected to fiber 4 for transport of signals from A to D, and to fiber 2 for transport of signals from ADMs D to A, as shown by arrow 5.

Figure 4B illustrates the case of a cable cut on fibers 2 and 4 between nodes E and D. In this case, the traffic AD/DA affected by the cable cut is redirected as described next. ADM D/E detects the line failure and begins protection signaling with ADM E/D on fibers 2-1 and 3-4. ADMs D and E are called the switching nodes.

The adding of traffic at A remains unchanged. The traffic from ADM A for D arrives at E in working time-slots on fiber 4. When node E detects the cable cut, it returns the traffic for node D towards node A in the protection time-slots on fiber 2 to be dropped at D from fiber 1. To this end, drop selector 9 at ADM D selects protection timeslots in fiber 1.

When node D detects the cable cut, the traffic added at D for A is redirected in the protection timeslots of fibers 3-4, until reaching node E, where it is looped back towards A in working time-slots on fiber 2. The dropping of traffic at A remains unchanged.

The passthrough traffic from ADM C towards ADM F travelling normally in the working timeslots on fibers 1 and 2, for example, is looped back at ADM D in fiber 3 protection timeslots. To this end, the switching node D connects working passthrough timeslots in fiber 1 to protection timeslots in fiber 3. Then, the looped back traffic arrives at switching node E in protection timeslots on fiber 4 where it is looped such that it is delivered to ADM F in working timeslots of fiber 2.

Thus, this type of ring provides for on-demand head-end bridge at the line layer, the tail-end selection depends on the head-end bridge, and there is tail-head signaling. The switching action only occurs at the nodes on either side of the fault, D and E in the example of Figure 4B.

Since for a BLSR configuration the protection timeslots are only used during a protection switch, they can be used for lower priority ET.

Figure 5A illustrates a ULSR according to this invention with six nodes A, B, C, D, E and F. The example shows traffic connectivity between nodes A and D under normal working conditions. Traffic added at node A and destined for node D flows clockwise (arrow 5) on the working fiber 1. The return path from node D to node A is in the same direction (arrow 5') on working fiber 2. The flow of traffic on the second fiber, the protection fiber, is in the opposite direction.

All nodes are in an idle state, as further illustrated in Figure 6A for node A. In this state, protection traffic is not established; fibers 3 and 4 are idle. Add traffic is inserted onto working fiber span 20 at node A, and the passthrough traffic is transferred from working fiber 2 onto working fiber 20. The drop traffic is selected at node A by drop selector 8 from working fiber 2.

It is apparent that the unidirectional traffic flow is similar to the working traffic flow in the UPSR illustrated in Figures 3A and 3B, except that there is no permanent protection bridge 6 or 7 at any node. Traffic is always added in the same direction and on the same fiber at the nodes illustrated Figures 5A and 5B.

On the other hand, the node states of the ULSR of Figures 5A and 5B are similar to those of the BLSR of Figures 4A and 4B and the protection actions are similar, except that they are unidirectional. Thus, there is tail-to-head signaling to request a bridge, which also triggers the intermediate nodes to drop into passthrough state. In general, the tail must see the head-end bridge prior to switching. The switching nodes involved in bridging/switching are on either side of the fault, as disclosed next with reference to Figures 5B, 6A-6D and 7. At each node, the incoming signals on both the working and the protection fibers are monitored for detecting signal failure (SF) or signal degradation (SD). If fiber span 10 between nodes C and D is cut, as shown in Figure 5B, node D will detect the absence of the respective incoming (W) signal. In the example of Figure 7, nodes D and C monitor the respective incoming signal for detecting a signal failure in step S1. As indicated above, in case of a cable cut between nodes C and D, node D would initiate the "SF on W" branch in step S2, while node C would initiate the "SF on P" branch in Step S10. Node D also establishes in steps S2 and S10 which fiber was affected, i.e. the working fiber 10, and/or the protection fiber 4. If working fiber 10 has been cut, node D requests in step S3 a bridge at node C by sending a long path request (LPR) on fiber 2 and a short path request (SPR) on fiber 3 around the ring.

When node C receives the long path request, it assumes a bridged state in step S4. Figure 6C shows node C in the bridged state, where the node bridges its add traffic, normally sent towards node D on working fiber 10, onto the protection fiber 3 towards the destination node(s).

Node C also loops the passthrough traffic from working fiber 1 to protection fiber 3. Traffic destined to any of nodes B, A, F, or E, is looped at node D from protection fiber 4 and arrives at the destination node(s) on working fiber 2, 20. The node C drop traffic is not affected.

In step S5, intermediate nodes B, A, F and E assume a full-passthrough state when they see the LPR. Figure 6B shows node B, for example, in a full passthrough state (solid lines), which is the mode of an intermediate node during a ring switch. In the full passthrough state, connection is established along the protection fiber 3 for accommodating protection traffic. No extra traffic (ET) is possible in this state. No change occurs to working traffic flow, fibers 20 and 1.

If, in step S6, node D receives an APS indication that node C is in the bridged state, then node D assumes a switched state per step S7. Figure 6D shows node D in the switched state. The traffic normally dropped from working fiber 10 is selected from the protection fiber 4. The passthrough traffic normally received from node C on working fiber 10 is also selected from the protection fiber 4 and directed on working fiber 2 towards the destination node(s) E, F, A,

B. The add traffic is unaffected.

If the failure is cleared, as determined in step S8, all nodes return to the idle state in step S9.

The signaling between the ring nodes for the case where the error is of an SD type is similar to that above for an SF type.

If node C determines in step S10 that the interruption affects only the protection fiber 4, node C requests a K-byte passthrough state in step S11, and the intermediate nodes assume the K-byte passthrough state in step S12. This is a subset of the full passthrough state; the differences are illustrated in Figure 6B by the dotted line. In this state, the K-bytes received on both working and protection fibers are propagated through the node. Although the K-bytes on the protection channel are passed through, extra traffic access is still available, which is different from the full pass-through state.

Figures 6A to 6D illustrate the various states of a ULSR node, which were described in connection with Figures 5A and 5B. Figure 6A shows ring node A in the idle state, Figure 6B shows ring node B in the passthrough or full pass-through state, Figure 6C shows ring node C in the bridged state, and Figure 6D shows ring node D in the switched state.

Since the ring of the invention has the similar bridging, passthrough, and switching functionality of a BLSR, a protection protocol similar to the GR-1230-CORE standard for a BLSR may be used, but without the rules associated with bidirectional actions and span switching.

The SONET APS bytes K1 and K2 are located in the line overhead (LOH) of the SONET frame, and are used for APS signaling between line level entities. These bytes are defined only for the first STS-1 of an STS-N signal.

The GR-1230-CORE BLSR K1-2 values can be modified for ULSR usage, as shown next. Tables 1 and 2 show the K-Bytes for these two types of rings, where the altered values are highlighted.

Table 1

| K1 Assignment | | | |
|---------------|---------------------|---------------------------|-------------------|
| K1 bits | Value | Indication (BLSR) GR-1230 | Indication (ULSR) |
| 1-4 | 1111 | LP-S, SF-P | LK-P |
| | 1110 | FS-S | SF-P |
| | 1101 | FS-R | FS |
| | 1100 | SF-S | - |
| | 1011 | SF-R | SF-W |
| | 1010 | SD-P | SD-P |
| | 1001 | SD-S | - |
| | 1000 | SD-R | SD-W |
| | 0111 | MS-S | - |
| | 0110 | MS-R | MS |
| | 0101 | | WTR |
| | 0100 | EX-S | - |
| | 0011 | EX-R | EX |
| | 0010 | RR-S | - |
| | 0001 | RR-R | - |
| | 0000 | NR | NR |
| 5-8 | DESTINATION NODE ID | | |

As seen in Table 1, all the span codes (LP-S, FS-S, SF-S, SD-S, MS-S, EX-S) are eliminated. Lockout of protection is assigned highest priority followed by SF on protection; this is similar to linear APS. The reverse request codes (RR-S, RR-R) are eliminated.

Table 2

| K2 Assignment | | | |
|---------------|----------------|---------------------------|-------------------|
| K2 bits | Value | Indication (BLSR) GR-1230 | Indication (ULSR) |
| 1-4 | Source Node ID | | |
| 5 | 1 | Long Path | Long Path |
| | 0 | Short Path | Short Path |
| 6-8 | 111 | L-AIS | L-AIS |
| | 110 | L-RDI | L-RDI |
| | 101 | - | - |
| | 100 | - | - |
| | 011 | ET | ET |
| | 010 | Br & Sw | Switched |
| | 001 | Bridged | Bridged |
| | 000 | Idle | Idle |

It is seen in Table 2 that the Bridged & Switched code collapses to the Switched code.

Figure 8 illustrates an example of an STS-3 signal formed with mixed ATM and non-ATM traffic. In this example, STS-1 #1 is an ATM mapped STS-1 which may carry up to 65,536 VCs. The ATM mapped STS-1 is protection switched per the ULSR scheme described above.

The second and third STS-1s of the Figure 8 example carry non-ATM traffic with VT and STS-1 mapping, respectively. The UPSR protection protocol is used for the non-ATM traffic.

In another example, an OC-12 structure may be obtained with some STS-1s carrying STM traffic of VT/STS-1 mapping and with some ATM traffic in increments of STS-1s or STS-3cs.

In general, the signal received/sent by a node from/to the ring is denoted in the following with STS-N. The non-ATM SONET-formatted signal is denoted with STS-W, comprising WxSTS-1s. The ATM SONET formatted signal is denoted with STS-Mc, where M represents the number of STS-1s concatenated for transporting a cell-based payload. An STS-Mc according to this invention also represents ATM traffic formatted as mxSTS-1s. It is to be understood that $W+M=N$, which is the bandwidth allocated to the respective node, and N, W and M are integers taking values 1, 2, 3, etc.

Figure 9 illustrates a block diagram of node A of Figures 5A and 5B according to this invention.

The term "incoming" is used in the following to designate the traffic direction from the ring to node A, while the term "outgoing" is used to designate the traffic direction from the node to the ring. The term "add" designates the direction from the trib ports to the node, while "drop" defines the direction from the node to the trib ports.

O/E interface 50 comprises an input working port and an output protection port. The input working port converts an incoming SONET formatted optical signal OC-N, received on working fiber 2, to an incoming electrical signal on line 51. The output protection port converts an outgoing electrical signal on line 52 to an outgoing SONET formatted optical signal OC-N on protection fiber 4. O/E interface 60 comprises an output working port, and an input protection port. The output working port converts the outgoing electrical signal on line 52 to an outgoing optical signal on working fiber 20, while the input protection port at interface 60 converts an incoming optical signal received on fiber 3 to an incoming electrical signal on line 51.

Interfaces 50 and 60 perform SONET physical layer operations. With respect to the incoming working traffic, the input working ports at interfaces 50 and 60 are also responsible for descrambling the incoming signal, stripping the section overhead (SOH) and the line overhead (LOH), and transmitting the incoming non-ATM STS-1s and the ATM STS-Mc to an STS management block 70. The incoming APS bytes are detected and validated, and the K-bytes are provided to an STS protection controller block 115. The input working port also performs clock recovery and synchronization of the STS paths.

Since working port at the interface 50 accesses the LOH, it is responsible for detecting errors in the incoming signal and performing comparisons with a provisioned signal degrade threshold. Exceeding the threshold constitutes an SD in protection terminology. Also, each interface 50 and 60 is responsible for detecting when its partner port has failed due to an equipment failure, removal, power loss, or local microcontroller failure.

With respect to the outgoing working traffic, the output working port at interface 60 is responsible for receiving the outgoing STS-1s and STS-Mc from the STS management block 70, generating the LOH and SOH, scrambling and converting the electrical signal to an outgoing optical signal OC-N, and transmitting it on fiber 20. The output working port also performs clock synthesis, synchronization, and updates the outgoing APS bytes.

The input and output protection ports at interfaces 50 and 60 perform the same functions as above for the termination and generation of the protection channel.

STS management block 70 supervises the communication of the incoming and outgoing signals between node A and the ring, according to the traffic mode.

For the incoming direction, STS management block 70 receives the incoming signal from interface 50 or 60 and routes the output ATM mapped STS-Mc to an ATM cell management block 90. As well, block 70 delineates the non-ATM STS-1s from the STS-W and routes them to a non-ATM payload management block 80. STS management block 70 also passes through the traffic that is not addressed to node A. For the outgoing traffic, STS management block 70 receives and routes an input ATM mapped STS-Mc from the ATM cell management block 90, and/or an input VT/STS-1 structured payload from the non-ATM payload management block 80.

Block 70 is responsible for UPSR protection for the non-ATM STS-1s, and the ULSR protection for the STS-Mc, under control of a STS protection controller 115. Since protection switching at node A is unidirectional, block 70 routes the outgoing signal always on output line 54, and the incoming traffic is received always from line 53. Prior art BLSRs need a second input and output line, since the traffic in this case is inserted or received to/from both directions.

For the input direction, ATM cell management unit 90 multiplexes the input cells received from the ports 92, 93, generates the path overhead (POH) and assembles an ATM structured input STS-Mc, which is presented to the STS management block 70 on line 71. For the output direction, block 90 delineates the output cells from the incoming STS-Mc, terminates the POH, and routes the drop/passthrough cells, as will be described in further detail in connection with Figure 10. The ATM cell management block 90 is interconnected with ATM ports 92, 93 in a star configuration.

ATM cell management block 90 also performs the protection for the ATM ports.

Non-ATM payload management block 80 may be for example a VT management block in the case of a VT/STS-1 structured payload. For the input direction, block 80 receives from bus 81 the add non-ATM traffic, such as VTs/STS-1s, generates the POH, maps the traffic into an input STS-1, and provides the non-ATM structured input payload to STS management block 70 on line 84, for routing to the ring. For the output direction, block 80 receives the non-ATM output STS-1s from STS management block 70 on line 85, strips the POH, and routes the drop traffic to the bus 81.

Block 80 provides the UPSR protection for VTs under the control of a non-ATM protection controller 116 and the protection for the non-ATM DS1s, and/or DS3s added/dropped at ports 82 and 83.

STS protection controller 115 bases its switching actions on the K-bytes passed from interfaces 50 and 60. Protection controller 115 manipulates the incoming and outgoing K-bytes and supervises the protection switching. For the non-ATM traffic, such as non-ATM STS-1s, it uses the UPSR protocol, and for the ATM traffic, such as the ATM STS-Mc, it uses the ULSR protocol. User protection commands, user provisioning and defaults are accepted by the STS protection controller. It also receives equipment status reports from blocks 50 and 60.

Setting the node into a bridged, switched or passthrough state according to the information in the K1 and K2 bytes of the incoming STS-Mc for ATM traffic takes place as disclosed in connection with Figures 5A and 5B. Thus, when node A assumes a switched state, the passthrough ATM traffic received from the protection fiber 3 are output onto the working fiber 20. The drop traffic is selected from the protection fiber 3 and the add traffic remains unaffected. In a bridged state, the passthrough ATM traffic is routed from the working fiber 2 onto protection fiber 4, the add traffic is bridged on protection fiber 4, and the drop traffic is selected from working fiber 2. In the full passthrough state, the passthrough cell mapped STS-Mcs are transported through the node from the protection fiber 3 to fiber 4, add traffic is still inserted on working fiber 20 and traffic is dropped from working fiber 2.

STS protection controller block 115 also performs protection switching for the STM STS-1s, according to the UPSR switching protocol illustrated in Figures 3A and 3B for the UPSR rings. STS protection controller block 115 also monitors the ATM trib ports 92, 93, to control ATM trib equipment protection.

Non-ATM protection controller unit 116 controls the UPSR bridge, switch, and passthrough functions for the non-ATM traffic (for example STM VTs) and tributary equipment protection for the ports 82, 83, which could be DS1/DS3 STM mappers.

The operation of the node is controlled by a common control processor, generally illustrated in Figure 9 by reference numeral 100.

Figure 10 illustrates in more detail the traffic routing between the ATM tribs and ATM cell management block 70. The architecture selected partitions the ATM layer cell add/drop/passthrough functionality, the trib physical medium dependent (PMD) and the transmission convergence (TC) sublayers to the ports.

ATM trib interfaces 105 and 107 perform some formatting to facilitate the hand-off between cell control unit 102 and trib units 92, 93, while STS management interface 101 performs formatting to facilitate the hand-off between cell control unit 102 and STS management block 70.

In the output direction, block 101 effects POH termination and cell delineation for the ATM STS-Mc, and transmits the output cells to cell control unit 102. Cell control unit 102 receives the output cells from block 101 and performs header inspection and address translation, if necessary, according to a routing table 104. Drop cells are sent to a trib interface 105 and/or 107, where they are formatted for handoff to the trib ports. Passthrough cells recognized within the output cells, are sent back to STS management interface 101 to form the input STS-Mc.

In the input direction, control unit 102 receives add cells from trib interface 105 and/or 107 and performs header inspection and address translation, if necessary, according to routing table 106. It then performs usage parameter control (UPC). Block 102 performs queue management of the input cell stream comprising add and passthrough cells, generates the POH and inserts the input cell stream into the input STS-Mc for hand-off to block 70, via block 101. It is apparent that block 102 has a much simplified design than needed for a bidirectional node, which require double bandwidth, overhead processing, buffering and table routing control.

Trib ports 92 and/or 93 receive a cell structured DS1 and/or DS3 in the add direction, and perform framing and clock recovery/synthesis. They then do cell delineation, and transmit the add cells to the cell management block 90. For the drop direction, the drop cells received from cell management block 90 are framed into a DS-n format and transmitted to the user.

Squelching is performed by cell control unit 102. With a BLSR, there is the concern for misconnecting X to Y traffic under node failure or node isolation scenarios, due to the timeslot reuse capability. With a ULSR carrying ATM traffic, a similar concern exists if cells reuse the same VPI/VCI and a common node fails or is isolated. Similar to a BLSR, the ATM ULSR will combat this issue by squelching traffic destined for the failed node. Even if VPI/VCI reuse does not occur around the ATM ULSR, there is still a benefit in squelching traffic destined for a failed node. The squelching, or discarding of cells destined for a failed node at the point they would enter the ring, ensures bandwidth is not wasted that could be used by other ATM traffic. Note that this has no analogy for STM traffic on a BLSR, since all bandwidth is dedicated. The general goal discussed in GR-2837-CORE for removing isolated cells is enhanced and used for the ring of this invention. The specific mechanism consists of the actions illustrated in Figure 11 and described next for node A of Figure 5B.

In steps S14-S15, the STS protection controller block 115 determines whether or not a node has failed or has been isolated whenever K-byte changes occur. If so, the corresponding node identification (ID) is found by comparing the node IDs in the new K-bytes with the ring node map, in step S16.

Next, the ID of the lost node is passed to the add interface 107 in step S17. Given the lost node ID, cell control unit can determine whether node A is adding cells with VPIs/VCIs associated with the lost node using routing table 106, which lists node IDs vs. terminating VPIs/VCIs. This is illustrated at step S17.

Locally added cells with VPIs/VCIs for the lost node are discarded by the cell control unit in step S18.

With this scheme, cells which have no place to go never enter the ring. This approach differs from the discussion in GR-2837-CORE, which does not appear to achieve the goal of freeing up as much ring bandwidth as possible. According to GR-2837-CORE, isolated cells are discarded only at the ring switching nodes, and therefore there would still be portions of the ring carrying isolated cells from the add node(s) to the switching nodes.

It is important to note that the ATM layer function of discarding incoming cells based on invalid VPI/VCI is a basic policing operation. Also, the SONET layer function of determining lost nodes is a basic protection function. The added functionality in the ring of the invention is the look-up table search of lost node ID vs. terminating VPIs/VCIs and the coordination of the existing functions mentioned.

Figure 12 shows an example of a ring according to the invention. Service access multiplexer (SAM) 121 receives Ethernet traffic and adapts it into a DS1 ATM UNI. As well, STM traffic, for example POTS signals at voice frequencies (vf), may be input to a private branch exchange (PBX) 122 to obtain a DS-1 trunk. The add/drop multiplexer (ADM) 123 constitutes a node in the ring 120 of the invention. Node 123 assembles the STM traffic into a VT1.5 and inserts it into STM STS-1#2, which travels around the ring. Similarly, the DS-1 UNIs received from the SAM 121 are assembled in the ATM STS-1#1.

Figure 13A illustrates a 2F-BLSR in a configuration for homing traffic where add/drop is only performed on one side of each node. The ring is used to transport bidirectionally a STS-3. Each node adds/drops a DS3 in both directions, as shown by the arrows between the nodes, and as such the add/drop traffic is symmetrical. It is apparent that a bidirectional STS-3 is available between adjacent nodes.

Figure 13B shows an application for providing a unidirectional path for a homing traffic with symmetrical add/drop at each node. It is apparent that a unidirectional STS-3 is available between all the nodes, which allows for an extra capacity of STS-3c in the opposite direction, as illustrated by the arrow in the ring, the traffic being still protected. This extra capacity may be used for the same type of traffic, or for unidirectional broadcast, as for example for delivering TV programs.

While the invention has been described with reference to particular example embodiments, further modifications and improvements which will occur to those skilled in the art, may be made within the purview of the appended claims, without departing from the scope of the invention in its broader aspect. In particular it will be understood that the invention

is equally applicable to both the North American SONET standard and the European SDH standard.

Claims

- 5 1. A method for communicating information over a synchronous (SONET/SDH) line switched ring having a plurality (K) of communication terminals connected to a first and a second transmission line, comprising the steps of:

at each terminal (k), inserting an outgoing signal onto said first transmission line along a first direction of trans-
mission defined from said terminal (k), towards an adjacent terminal (k+1), wherein (k) is an integer between
10 1 and (K) giving the sequential position of said node (k) in said ring;
at each said terminal (k), receiving an incoming signal over said first transmission line from an adjacent termi-
nal (k-1), along said first direction of transmission; and
operating said plurality of communication terminals according to a unidirectional protection protocol upon
detection of a failure condition in said incoming signal.
- 15 2. A method as claimed in claim 1, wherein said incoming signal is an incoming asynchronous transfer mode (ATM) STS-Mc and said outgoing signal is an outgoing ATM STS-Mc.
- 20 3. A method as claimed in claim 1, wherein said incoming signal is an incoming STS-N comprising an incoming non-ATM STS-W and an incoming ATM STS-Mc, and said outgoing signal is an outgoing STS-N comprising an outgoing non-ATM STS-W and an outgoing ATM STS-Mc, wherein $M+W=N$.
- 25 4. A method as claimed in claim 3, wherein each of said incoming and outgoing STM STS-W comprises a plurality of virtual tributaries (VT).
- 30 5. A method as claimed in claim 2, wherein said unidirectional protection protocol operates according to a variant of BellCore GR-1230-CORE standard, comprising unmodified assignments for all bytes of the transport overhead (TOH) field of said incoming signal, but:

a modified assignment of bits 0-4 of the K1 byte, wherein the span code (LP-S, SF-P) is used for a lockout of
protection code (LP-P), span code FS-S is used for a signal fail on protection code (SF-P), span codes (SF-S),
(SD-S), (MS-S) and EX-S), and reverse request codes (RR-S) and (RR-P) are eliminated; and
a modified assignment of bits 6-8 of the K2 byte, wherein the code "Bridges and Switched" is used for a code
"Switched".
- 35 6. A method as claimed in claim 3, wherein said unidirectional protection protocol operates according to BellCore GR-1230-CORE standard for said incoming and outgoing non-ATM STS-W and according to a variant of BellCore GR-1400-CORE standard for said incoming and outgoing ATM STS-Mc, said variant comprising unmodified assignments for all bytes of the transport overhead (TOH) field of said incoming signal, but:

a modified assignment of bits 0-4 of the K1 byte, wherein the span code (LP-S, SF-P) is used for a lockout of
protection code (LP-P), span code FS-S is used for a signal fail on protection code (SF-P), span codes (SF-S),
(SD-S), (MS-S) and EX-S), and reverse request codes (RR-S) and (RR-P) are eliminated; and
a modified assignment of bits 6-8 of the K2 byte, wherein the code "Bridges and Switched" is used for a code
"Switched".
- 40 7. A method for transporting a SONET/SDH formatted asynchronous transfer mode (ATM) signal on a unidirectional line switched ring comprising the steps of:

connecting a plurality (K) of nodes in a ring network provided with a working transmission line associated with
a first direction of transmission and a protection transmission line associated with a second direction of trans-
mission, opposite to said first direction;
detecting at a node (k) an error signal received from a node (k-1) located adjacent to said node (k) and
upstream with respect to said first direction;
45 at said node (k), generating a status change request upon receipt of said error signal, and transmitting said sta-
tus change request on said working and protection transmission line; and
restructuring all said nodes of said ring to operate according to one of a working transmission line failure
(WTLF), a node failure (NF), a protection transmission line failure (PTLF), and a working and protection trans-

mission line failure (WPTLF) configuration, upon receipt of said status change request.

8. A method as claimed in claim 7, further comprising the step of restructuring all said nodes of said ring for operation in an idle state upon receipt of a ring recovery request.

9. A method as claimed in claim 7, wherein said error signal indicates one of a lost connection (SF) and a degraded connection (SD).

10. A method as claimed in claim 8, wherein said ATM traffic comprises one of an STS-Mc and a plurality (M) of STS-1s.

11. A method as claimed in claim 10, wherein said error signal, said status change request and ring recovery request signals are transported around said ring in the K-bytes of the transport overhead (TOH) of said STS-Mc.

12. A method as claimed in claim 7, wherein said step of restructuring all nodes into said WTLF configuration comprises:

remodelling said node (k) to assume a switched state;
remodelling said node (k-1) to assume a bridged state; and
remodelling all remaining nodes (p), where $p \neq k, k-1$, to assume a passthrough state.

13. A method as claimed in claim 12, wherein said node (k) in said switched state performs the operations of:

receiving an incoming ATM STS-Mc from said protection transmission line;
determining the address of a destination node (q) for said incoming ATM STS-Mc,
routing said incoming ATM STS-Mc from said protection transmission line onto said working transmission line if said destination node (q) is not said node (k);
extracting said incoming ATM STS-Mc from said protection fiber if said destination node (q) is said node (k);
and
inserting an outgoing STS-Mc originating at said node (k) into said working transmission line.

14. A method as claimed in claim 12, wherein a node (p) in said passthrough state performs the operations of:

receiving an incoming ATM STS-Mc from said working transmission line;
determining the address of a destination node (q) for said incoming ATM STS-Mc;
extracting said incoming ATM STS-Mc from said working transmission line, if said destination node (q) is same as said node (p);
routing any traffic received on said protection transmission line back onto said protection transmission line if said destination node (q) is not said node (p); and
inserting an outgoing STS-Mc originating at said node (p) onto said working transmission line.

15. A method as claimed in claim 12, wherein said node (k-1) in said bridges state performs the operations of:

receiving an incoming ATM STS-Mc on said working transmission line;
determining the address of a destination node (q) for said incoming ATM STS-Mc;
extracting said incoming ATM STS-Mc from said working transmission line if said destination node (q) is same as said node (k-1);
routing said incoming ATM STS-Mc from said working transmission line onto said protection transmission line if said destination node (q) is not said node (k-1); and
inserting an outgoing STS-Mc originating at said node (k-1) onto said protection transmission line.

16. A method as claimed in claim 12, further comprising the steps of:

identifying at said node (k) if said status change request indicates a NF error and determining the address of a failed node;
receiving an incoming ATM STS-Mc and determining the address of a destination node (q) for said incoming ATM STS-Mc; and
discarding incoming ATM STS-Mc if the address of said destination node (q) is the same as the address of said.

failed node.

17. A method for communicating information on a bidirectional line switched ring (BLSR) configuration including a plurality (K) of ring nodes connected by a first and a second transmission line, comprising the steps of:

5 deploying said BLSR in a homing-type configuration, each node (k) having an incoming path associated with a node drop direction and an outgoing path associated with a node add direction:
 at a first node (q), where $q \neq k$, of said BLSR, transmitting a first SONET/SDH formatted signal along said first transmission line, said first SONET/SDH formatted signal having a bandwidth $K \times BW$;
 10 at each node (k), where $k \neq q$, of said BLSR, receiving said first SONET/SDH formatted signal from said first transmission line, extracting same over a respective incoming path, and re-transmitting said first SONET/SDH formatted signal over a respective outgoing path back into said first transmission line;
 at each said node (k), inserting a respective outgoing SONET/SDH formatted signal into said second transmission line over said respective outgoing path, each outgoing SONET/SDH formatted signal comprising traffic formatted at a respective node (k), and having a bandwidth BW; and
 15 at each said node (k), extracting a respective incoming SONET/SDH formatted signal received from said second transmission line over said respective incoming path, each incoming SONET/SDH formatted signal comprising traffic addressed to said respective node (k), and having said bandwidth BW.

- 20 18. A node for a SONET/SDH line switched ring comprising:

a first ring interface with a first working port for receiving an incoming optical signal OC-Mc from a working transmission line associated with a first direction of transmission, and converting same into an incoming STS-Mc;
 25 a second ring interface with a second working port for converting an outgoing STS-Mc into an outgoing optical signal OC-Mc and transmitting same over said working fiber;
 an ATM cell management block for routing an output ATM cell extracted from said incoming STS-Mc as one of a drop ATM cell and a passthrough ATM cell, and multiplexing said passthrough ATM cell and an add ATM cell into said outgoing STS-Mc; and
 30 an STS management block for routing said incoming STS-Mc between said first ring interface and said ATM cell management block, and said outgoing STS-Mc between said ATM cell management block and said second ring interface.

- 35 19. A node as claimed in claim 18, further comprising:

a first protection port at said second interface, connected to a protection transmission line associated with a second direction of transmission opposed to said first direction of transmission;
 a second protection port at said first interface connected to said protection transmission line; and
 40 an STS protection controller for detecting an error signal in said incoming STS-Mc and instructing said STS management block to configure said first and second ring interfaces to route said incoming STS-Mc and said outgoing STS-Mc in conformity with a unidirectional line switched protection protocol (ULSP).

20. A node as claimed in claim 18, wherein said ATM cell management unit comprises:

45 a STS management interface for receiving said incoming ATM signal and delineating therefrom said drop and said passthrough ATM cells and for receiving said add ATM cell and multiplexing same into said outgoing ATM signal;
 a cell control unit for routing said add, drop and passthrough ATM cells to one of said ATM trib interface and said STS management interface, according to a respective virtual path identifier (VPI);
 50 an ATM trib interface for receiving said drop ATM cell and routing same to an ATM trib port, and for receiving said add cell from said ATM trib port and routing same to said cell control unit;
 a first routing table for storing the VPI of said drop ATM cell and passthrough ATM cell; and
 a second routing table for storing the VPI of said add ATM cell.

- 55 21. A node for a SONET/SDH line switched ring comprising:

a first ring interface with a first working port for receiving a SONET/SDH formatted incoming optical signal from a working transmission line associated with a first direction of transmission, and converting same into an

incoming non-ATM signal and an incoming ATM signal;

a second ring interface with a second working port for converting an outgoing non-ATM signal and an outgoing ATM signal into an outgoing SONET/SDH formatted optical signal and transmitting same over said working transmission line;

5 an ATM cell management block for processing and transmitting an output ATM cell extracted from said incoming ATM signal as one of a drop ATM cell and a passthrough ATM cell, and multiplexing said passthrough ATM cell and an add ATM cell into said outgoing ATM signal;

10 an STS management block for routing said incoming non-ATM signals as one of an output non-ATM signal and a passthrough non-ATM signal, routing said passthrough non-ATM signal and an input non-ATM signal as said outgoing non-ATM signal and routing said incoming and outgoing ATM signals between said first and said second ring interfaces and said ATM cell management block; and

a non-ATM payload management for processing and transmitting said output non-ATM signal to a non-ATM port, and for processing and transmitting said outgoing non-ATM signal to said STS management block.

15 22. A node as claimed in claim 21, further comprising:

a first protection port at said second interface, connected to a protection transmission line associated with a second direction of transmission opposed to said first direction of transmission;

a second protection port at said first interface connected to said protection transmission line;

20 an STS protection controller for detecting an error signal in said incoming ATM signal and said incoming non-ATM signal, and for instructing said STS management block to configure said first and second interfaces to route said incoming and said outgoing ATM signals in conformity with a unidirectional line switched protection protocol (ULSPP), and to route said incoming and outgoing non-ATM signals in conformity with an unidirectional path switched protection protocol (UPSPP); and

25 a non-ATM protection controller for detecting a further error signal in said output and input non-ATM signals and instructing said non-ATM payload management to route said output and input non-ATM signals between said STS management block and said non-ATM port according to said UPSPP.

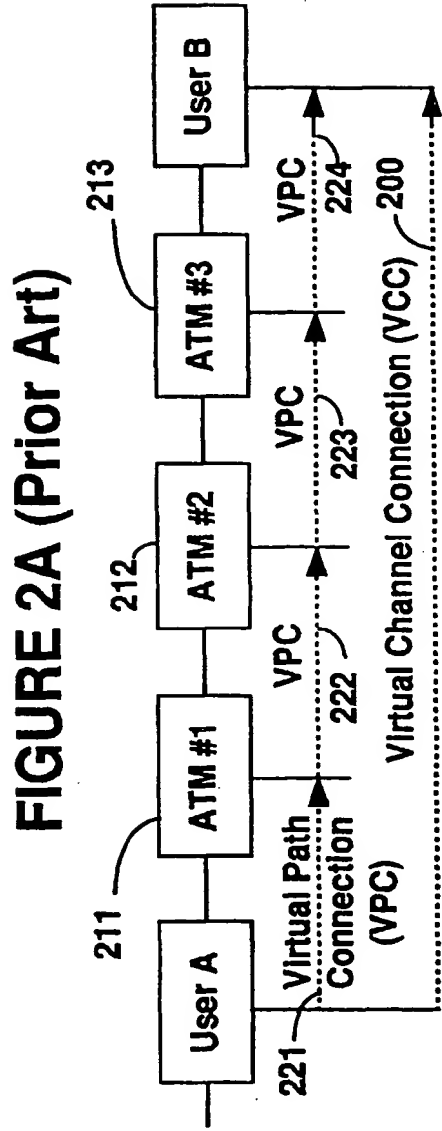
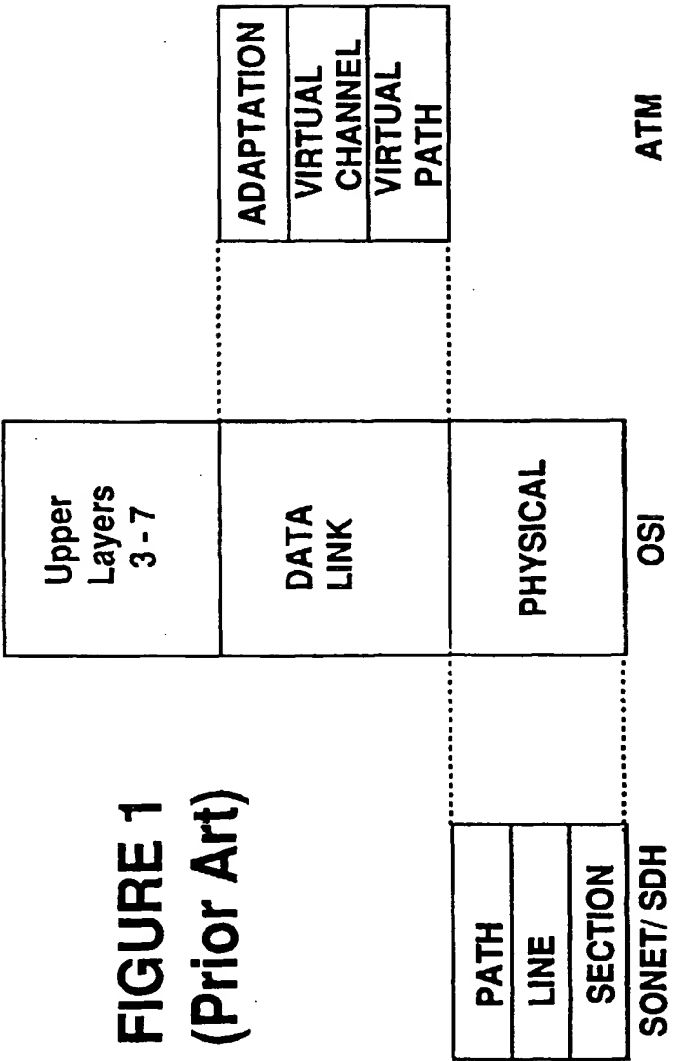


FIGURE 2B
(Prior Art)

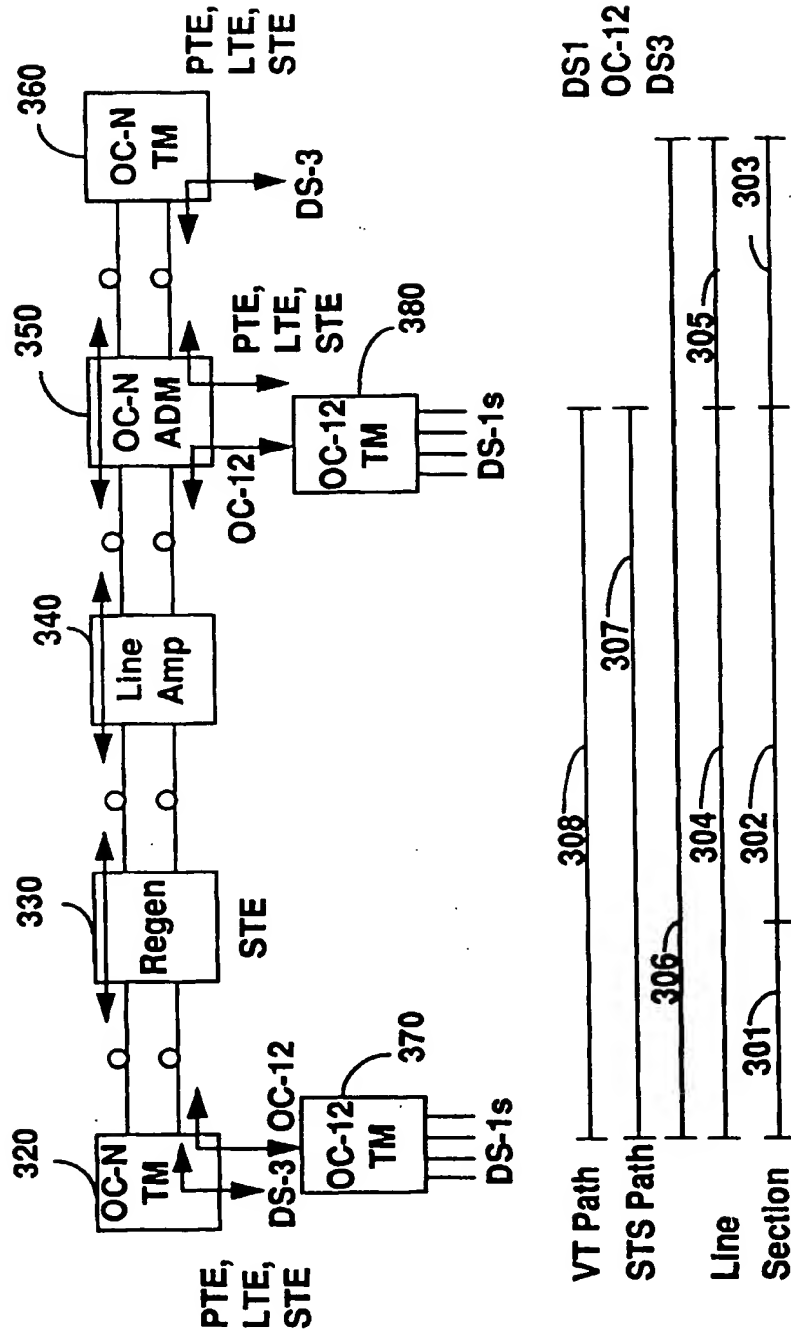


FIGURE 3B

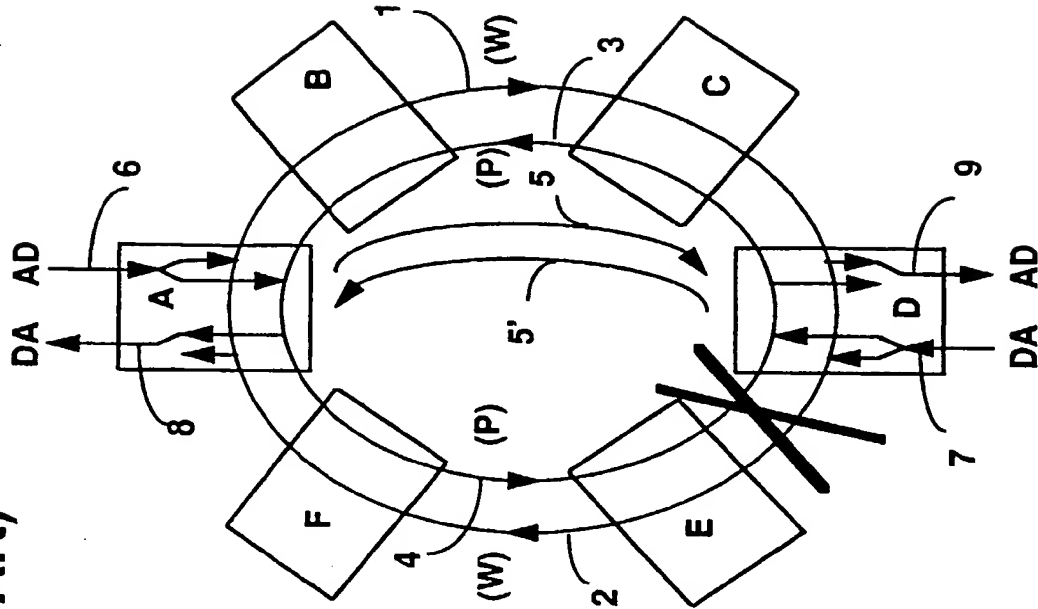


FIGURE 3A

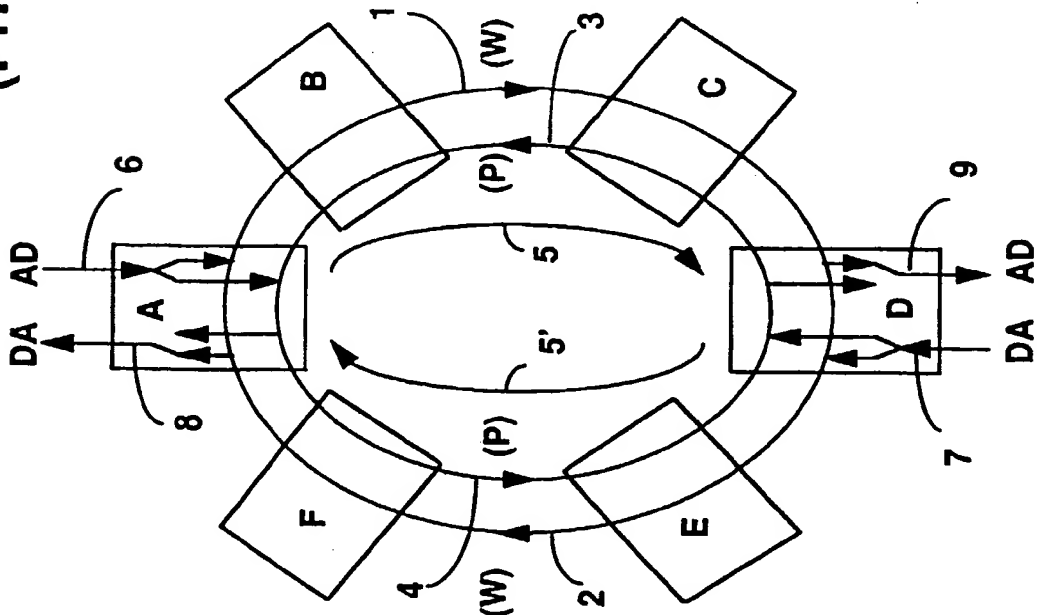


FIGURE 5B

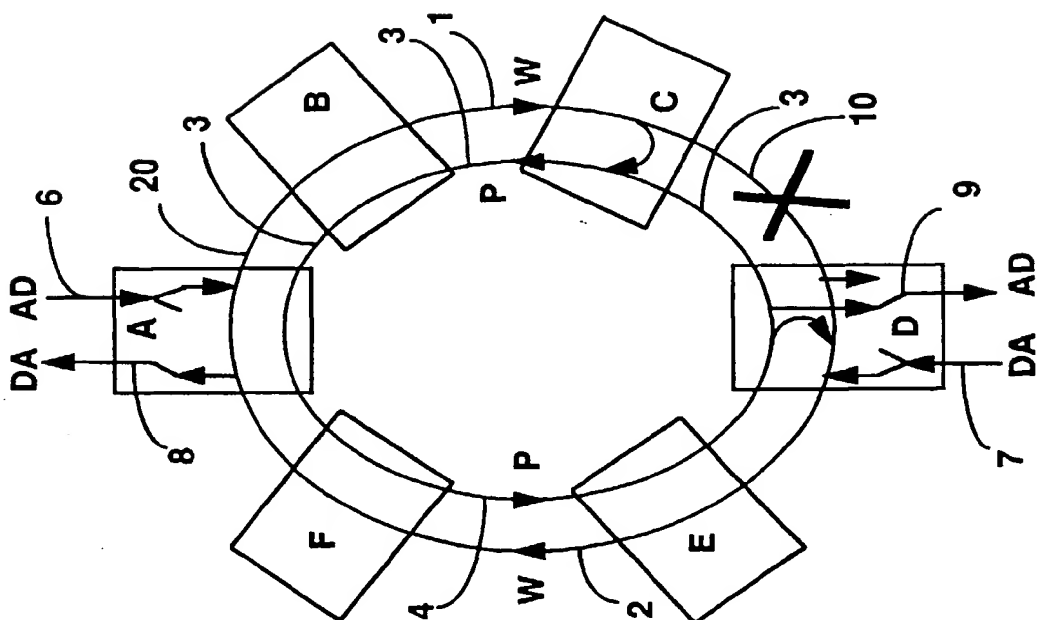


FIGURE 5A

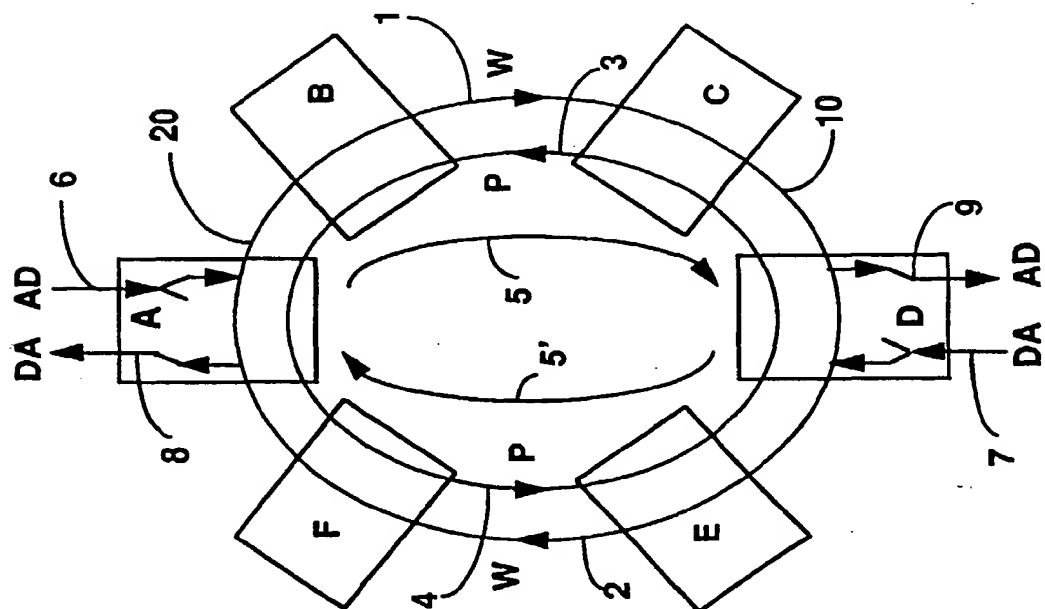


FIGURE 6B

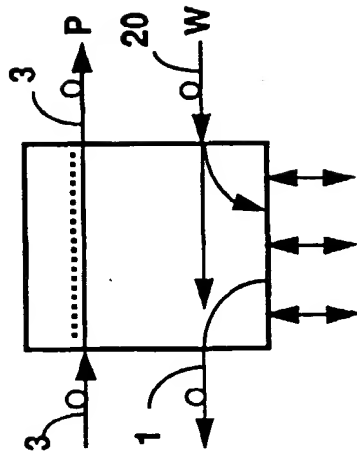


FIGURE 6D

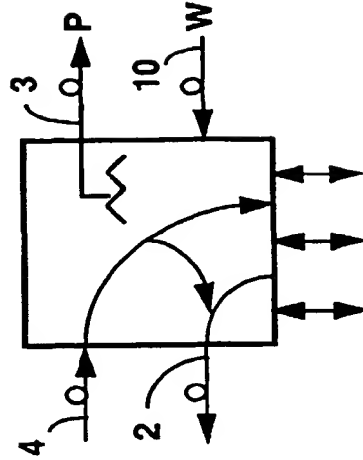


FIGURE 6A

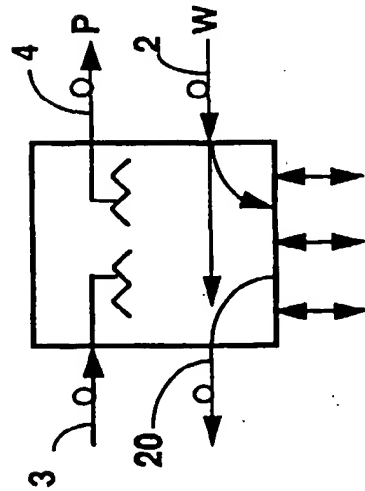


FIGURE 6C

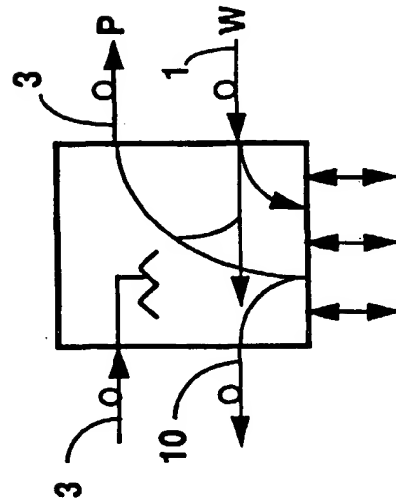


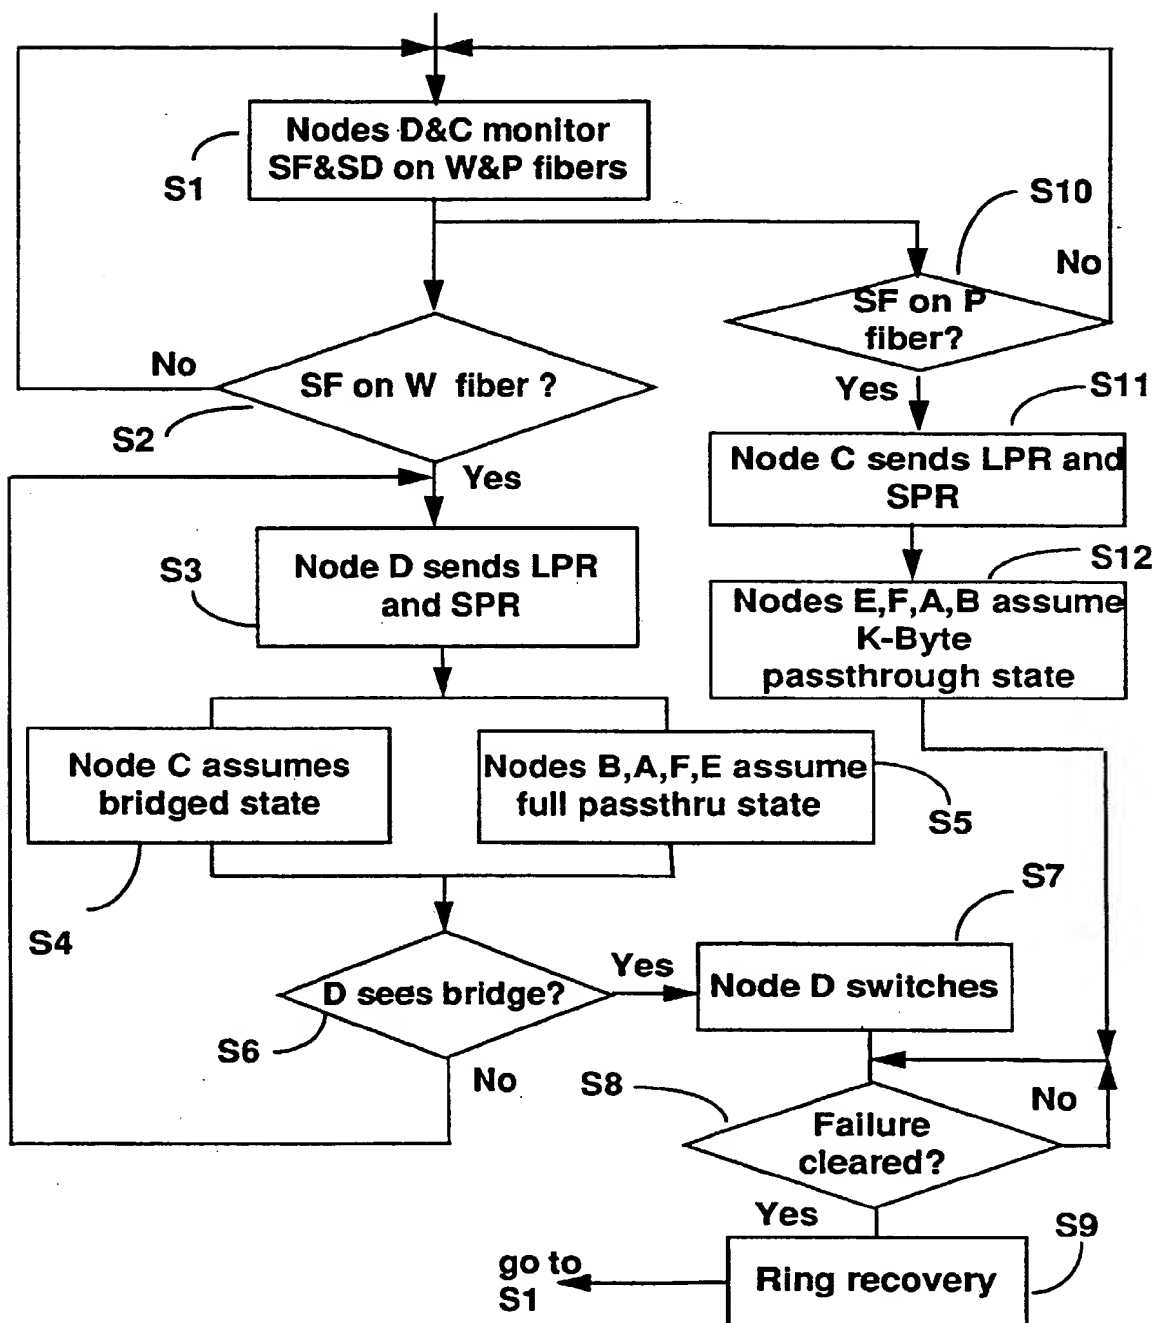
FIGURE 7

FIGURE 8

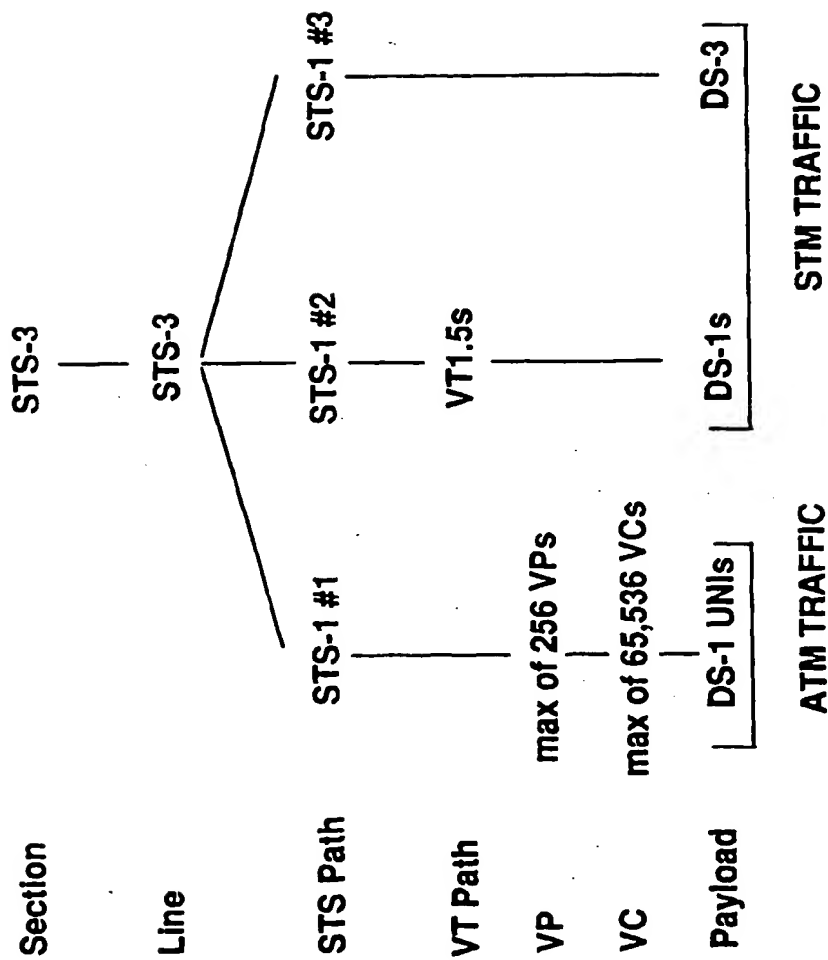


FIGURE 9

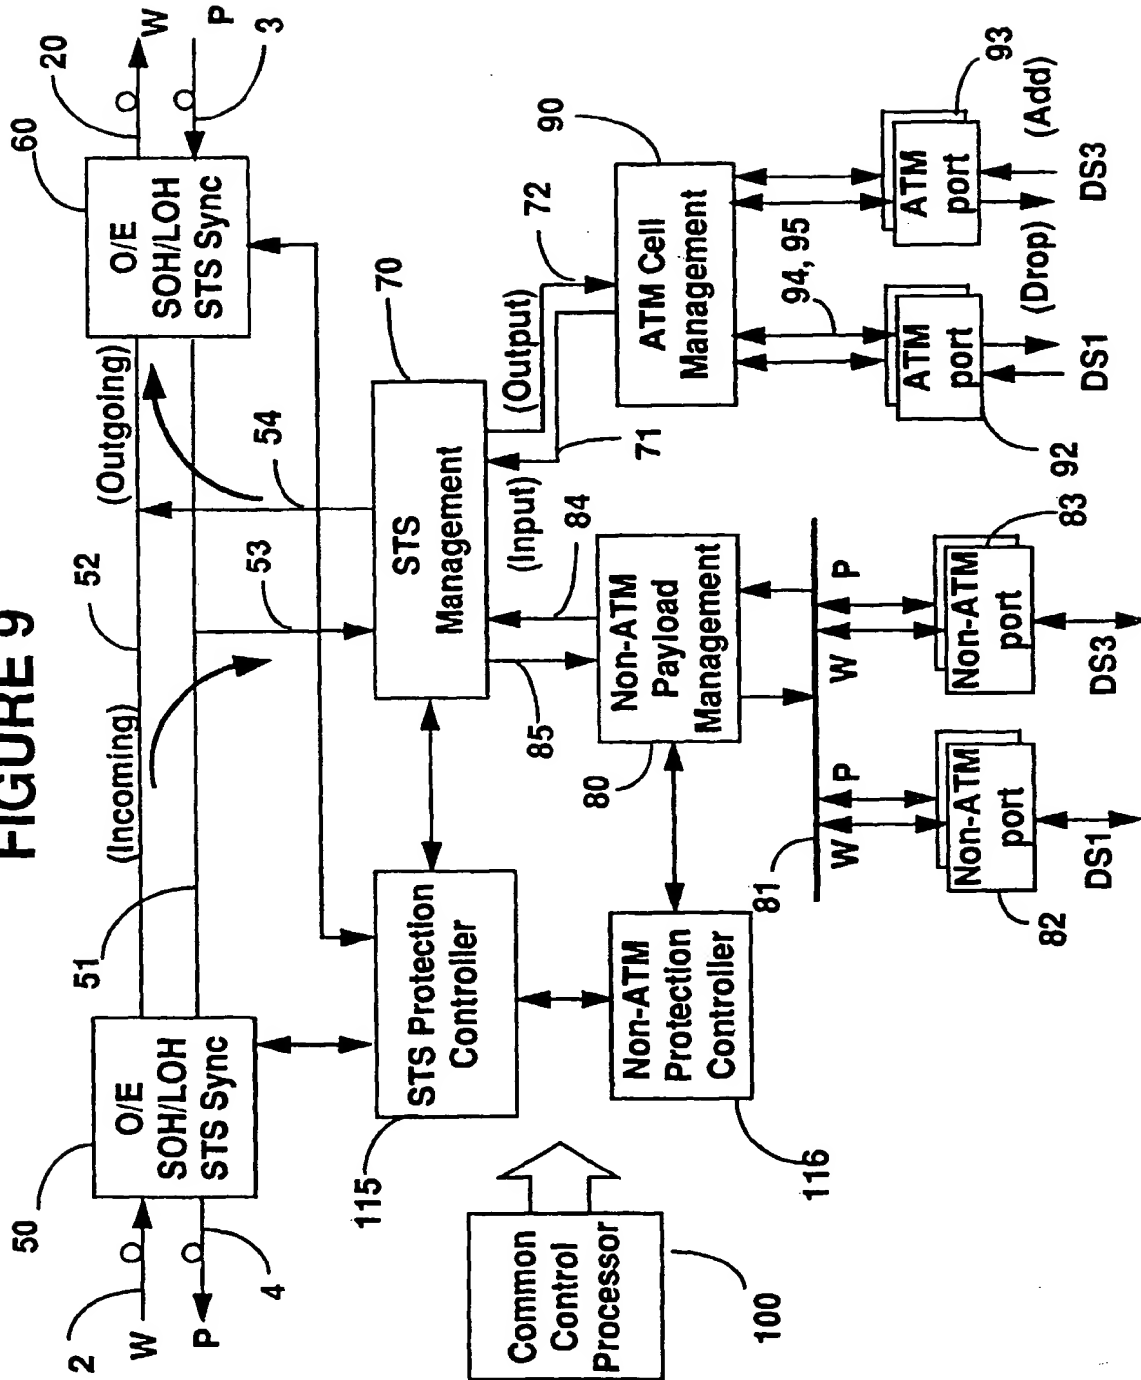


FIGURE 10

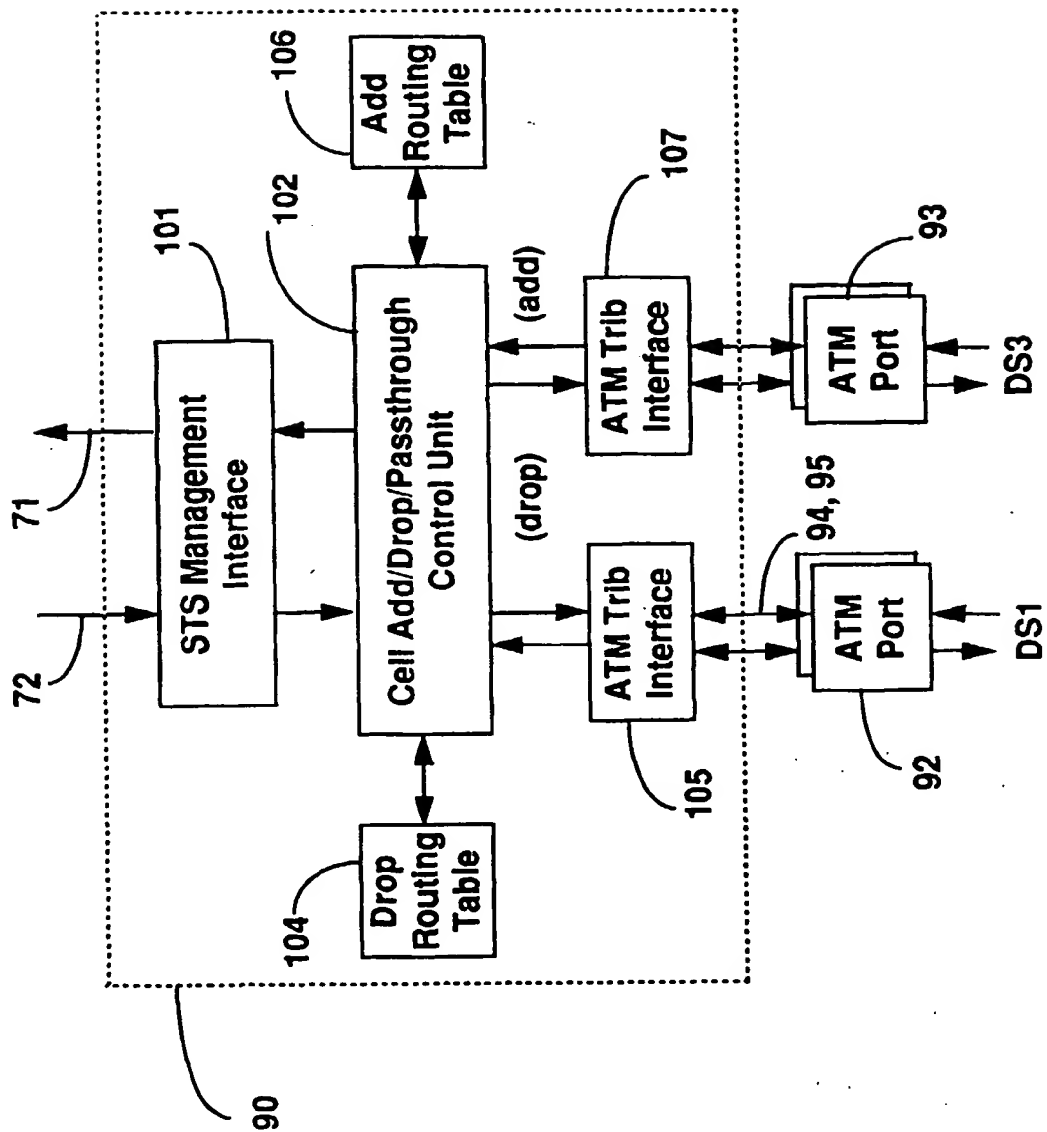



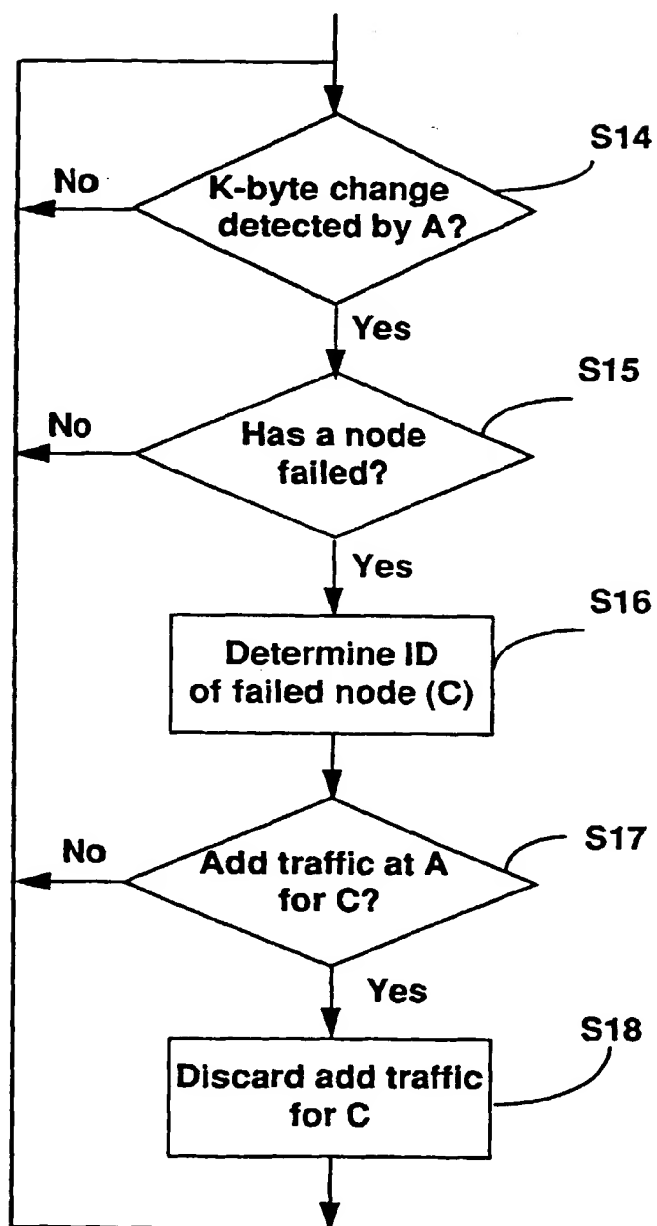
FIGURE 11

FIGURE 12

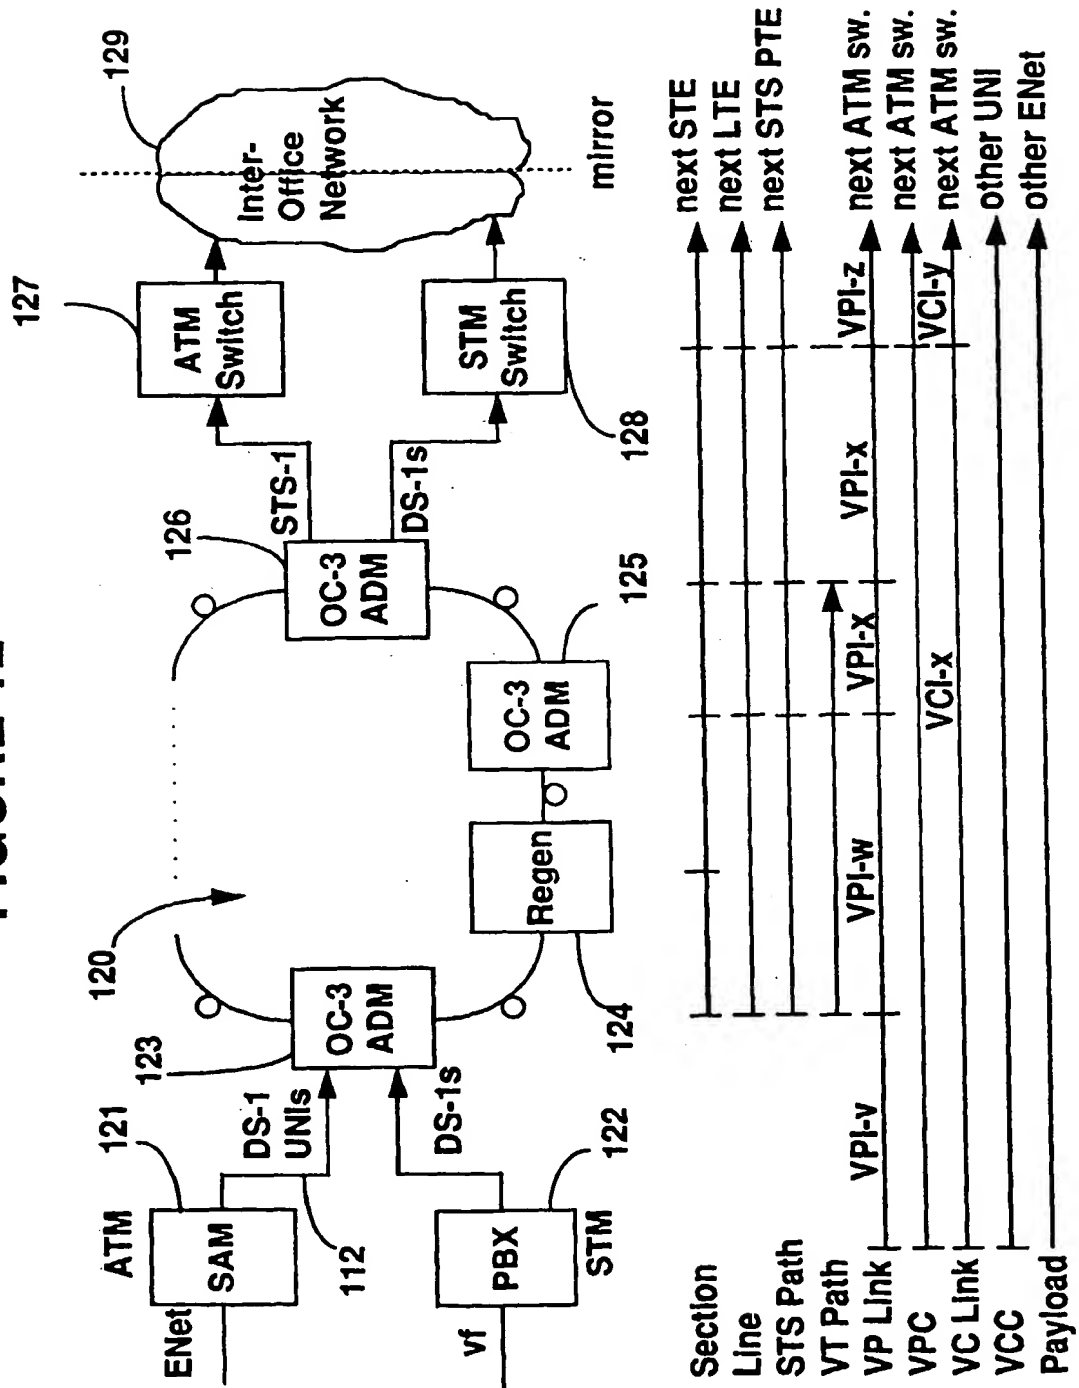

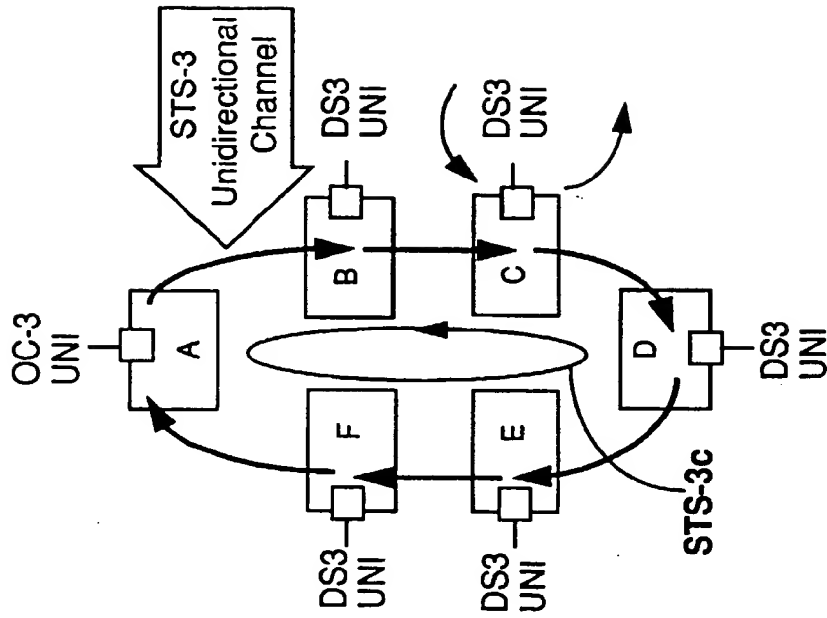


FIGURE 13B

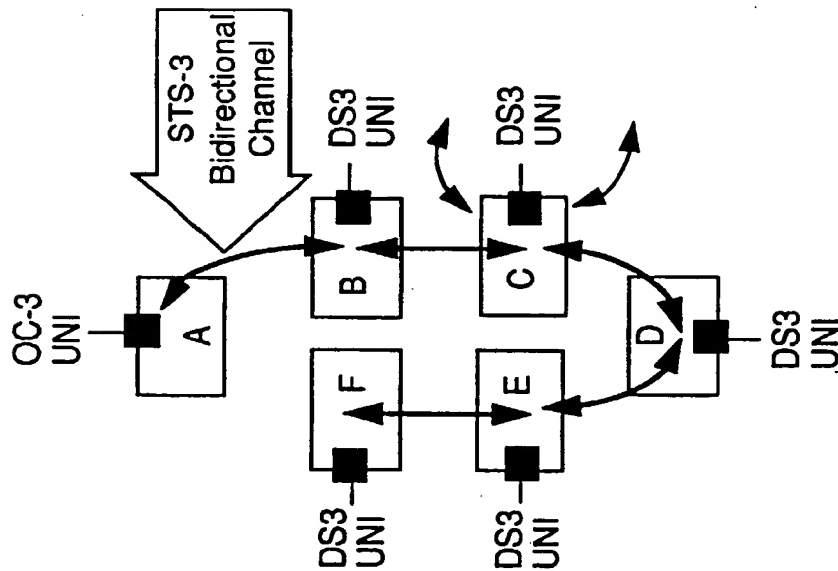


FIGURE 13A

**FIGURE 1
(Prior Art)**

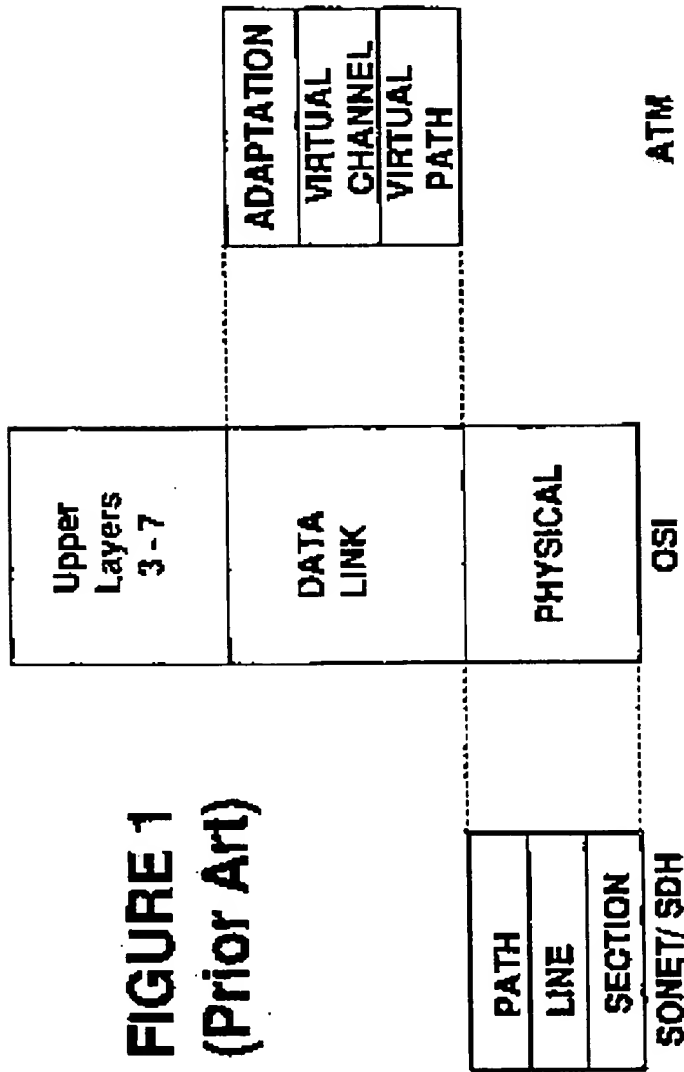


FIGURE 2A (Prior Art)

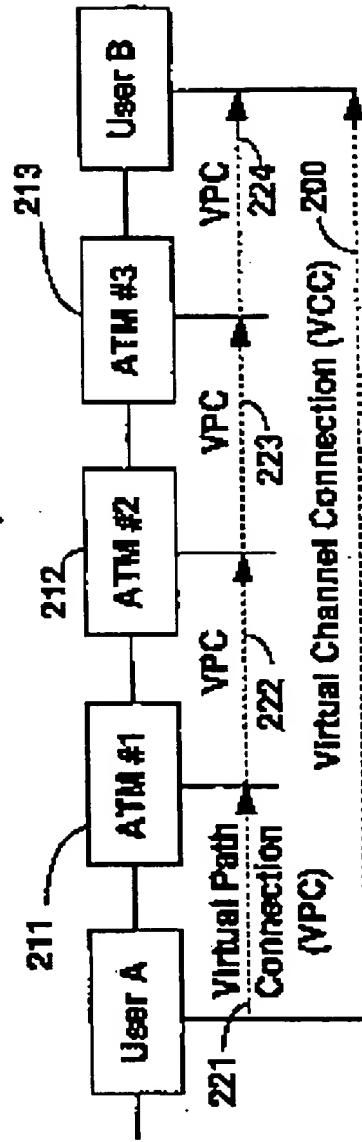


FIGURE 2B
(Prior Art)

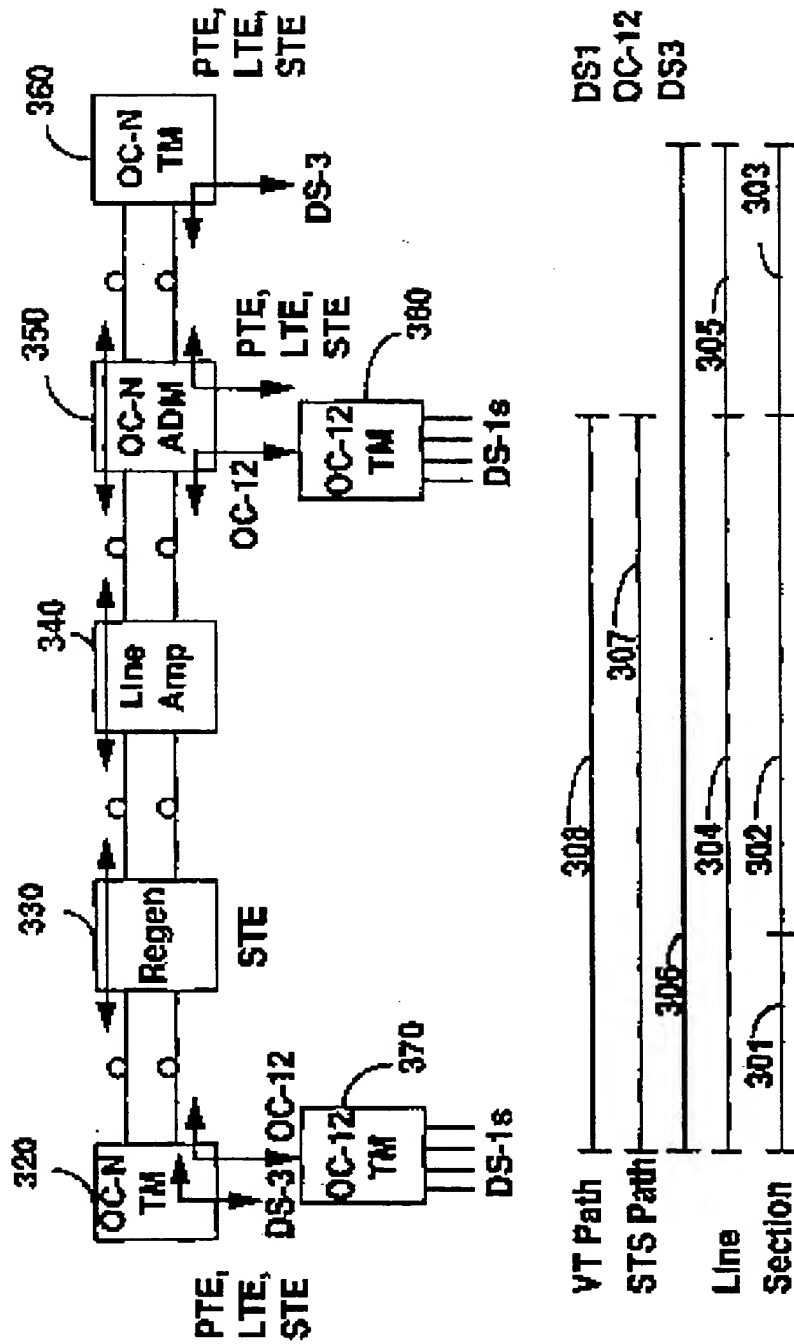


FIGURE 4B

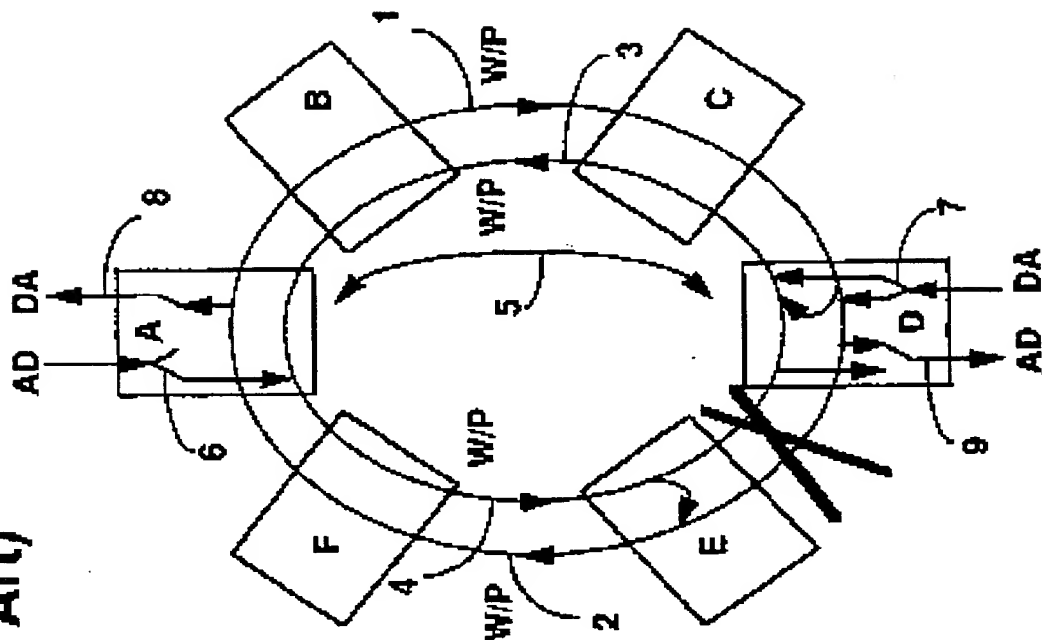


FIGURE 4A

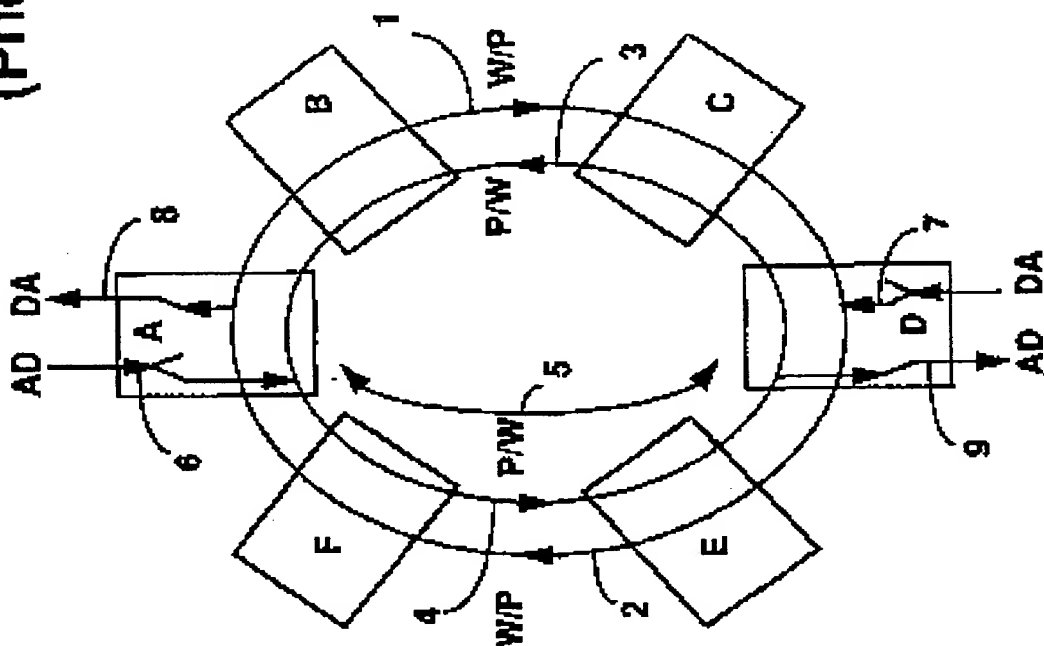


FIGURE 5B

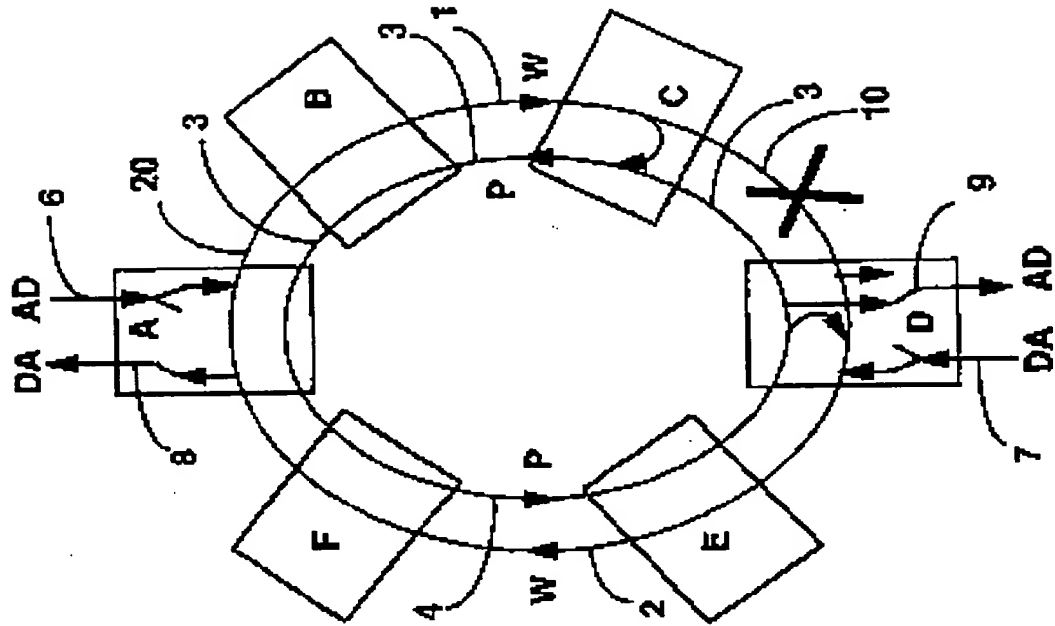


FIGURE 5A

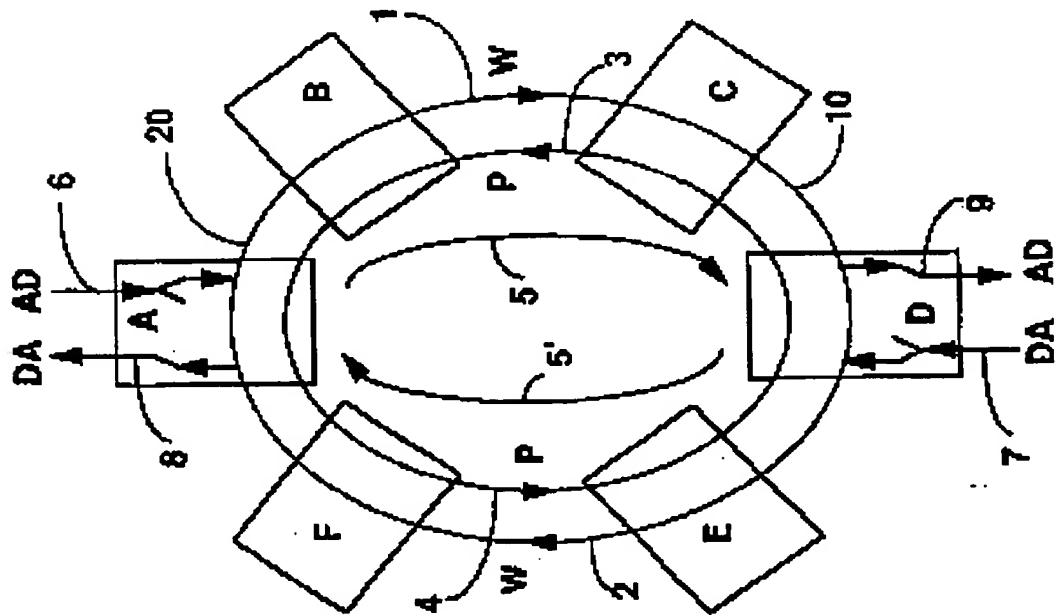


FIGURE 6B

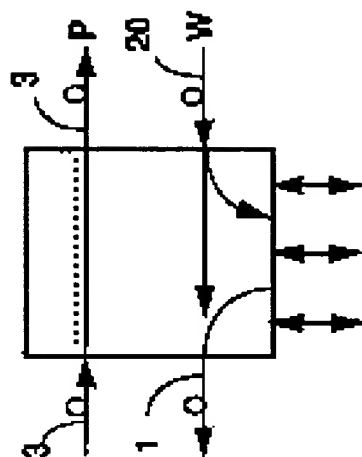


FIGURE 6D

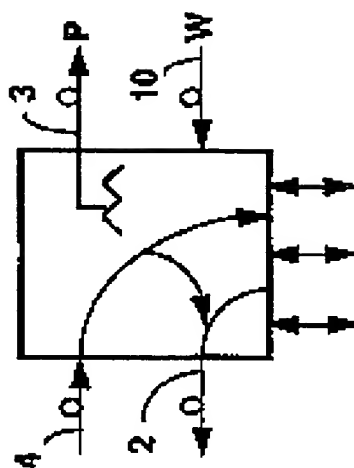


FIGURE 6A

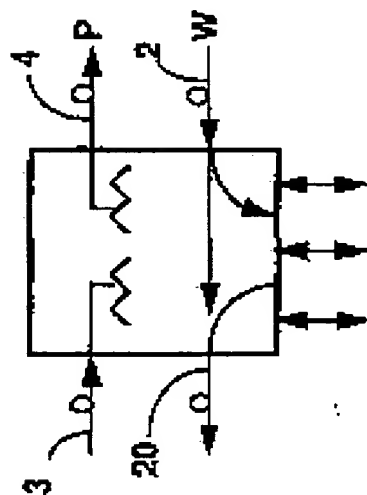


FIGURE 6C

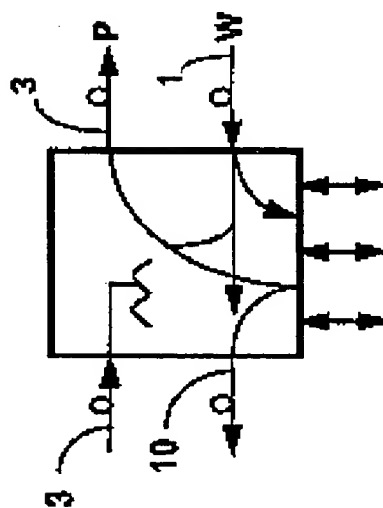


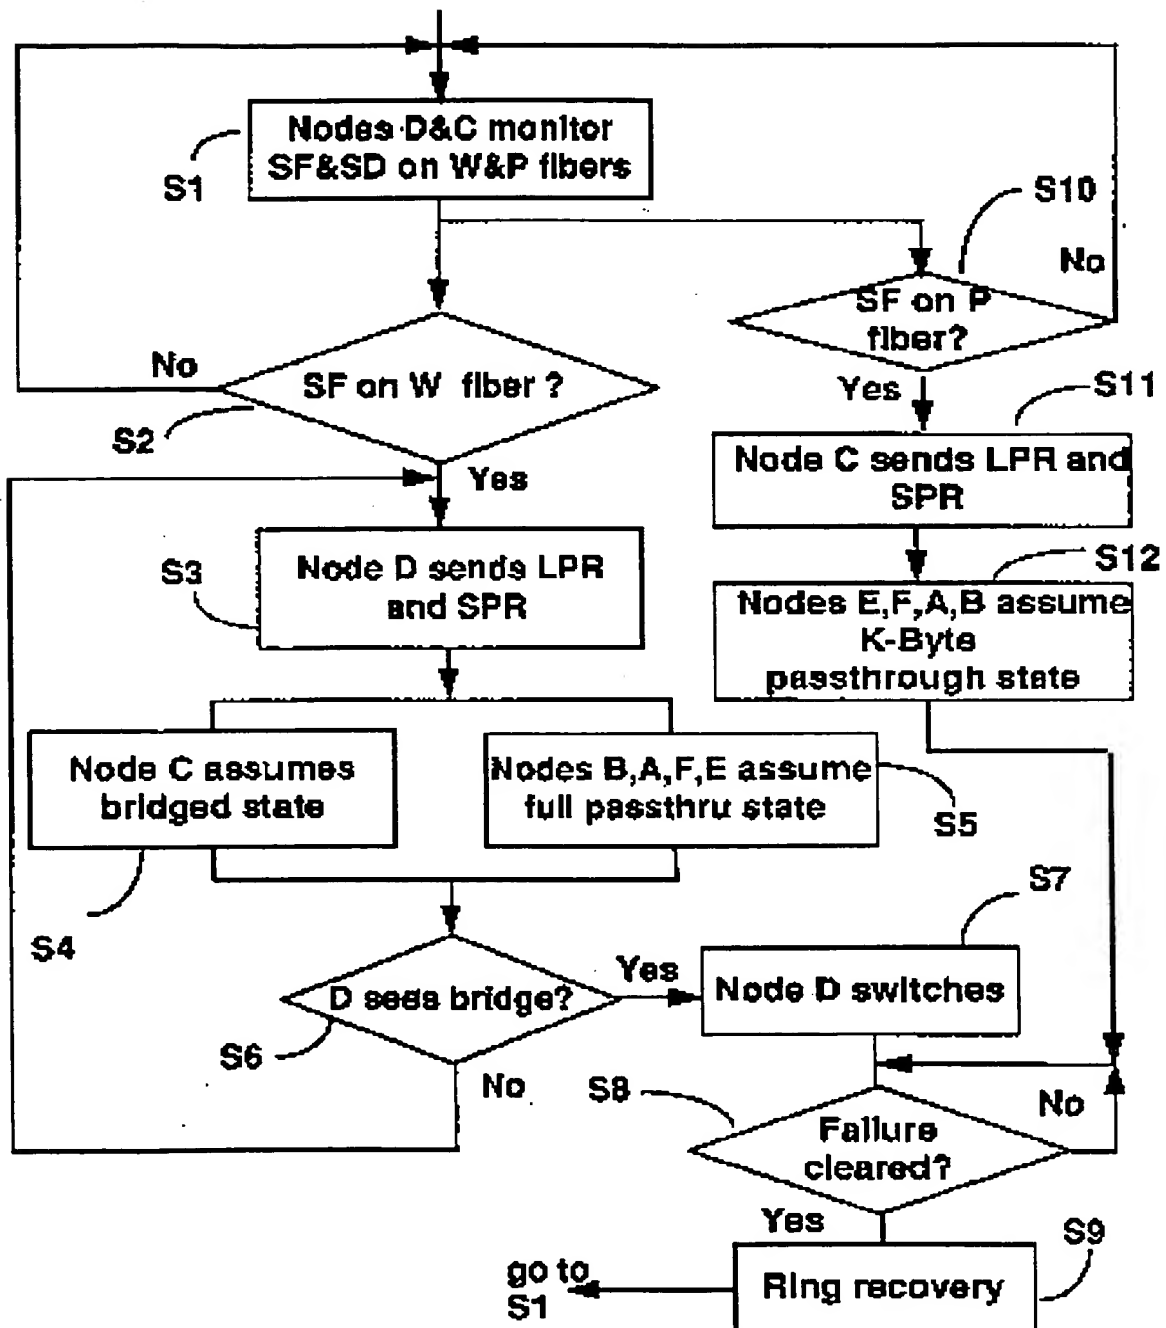
FIGURE 7

FIGURE 8

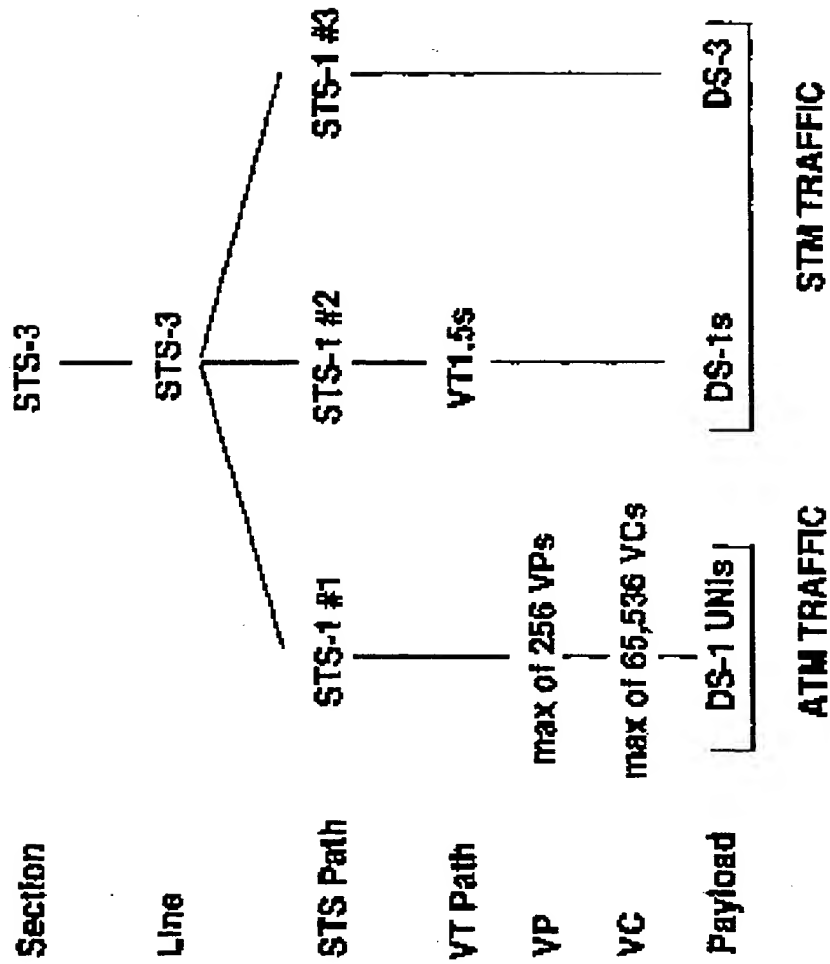


FIGURE 9

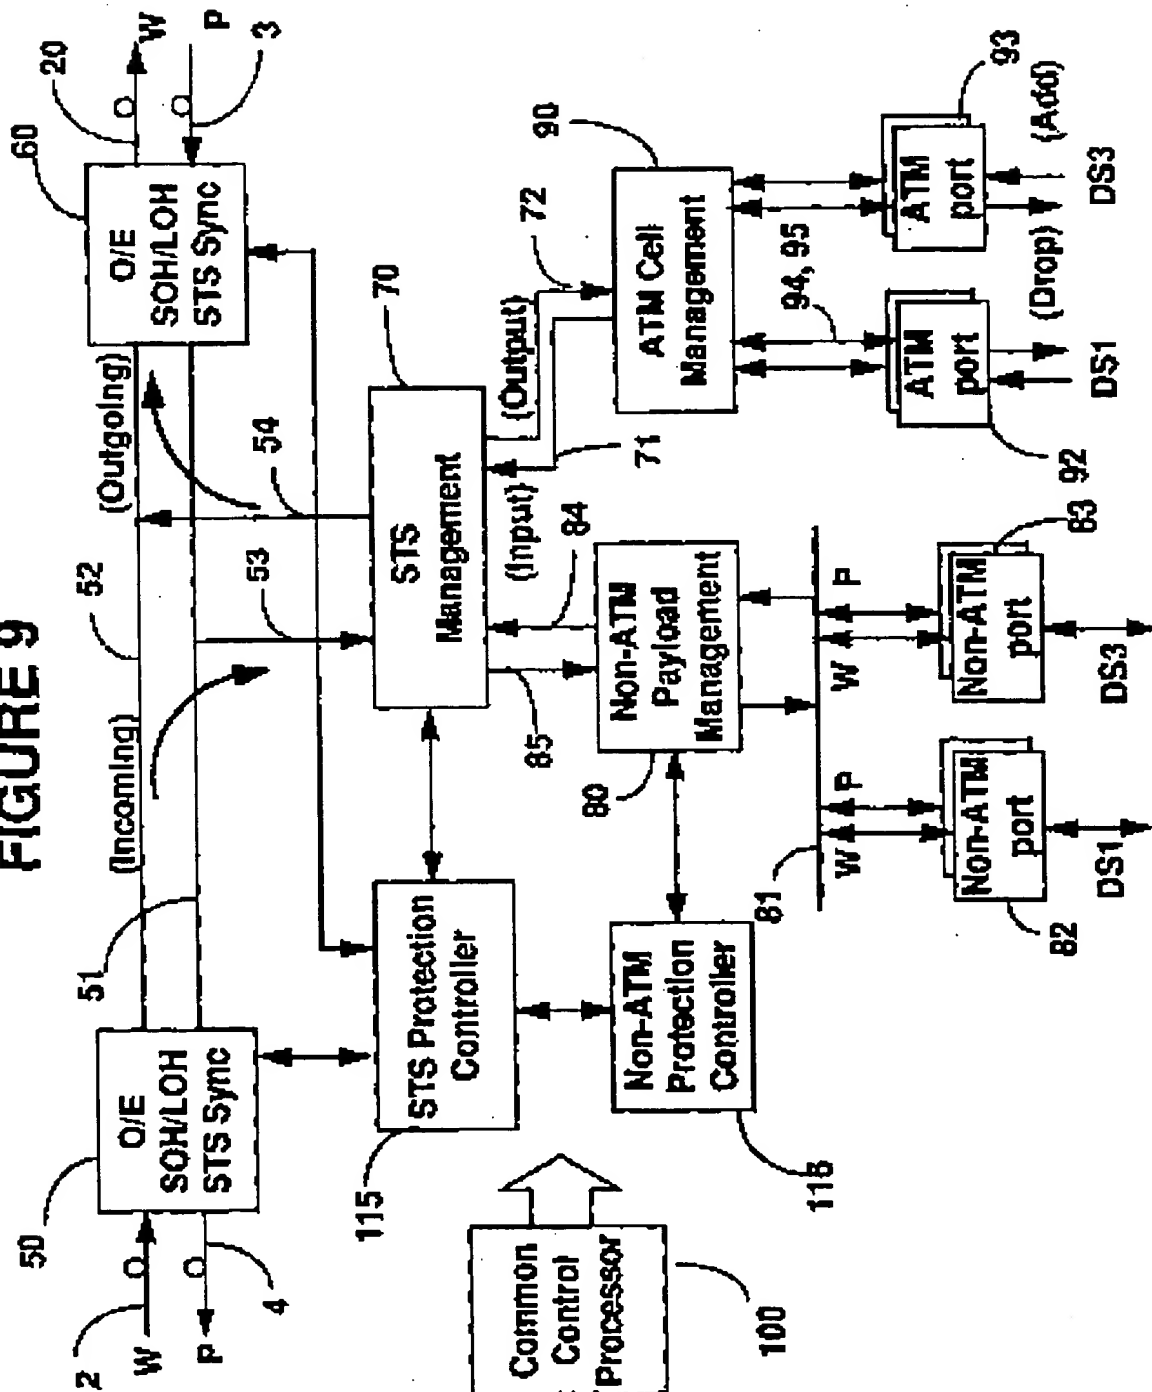


FIGURE 10

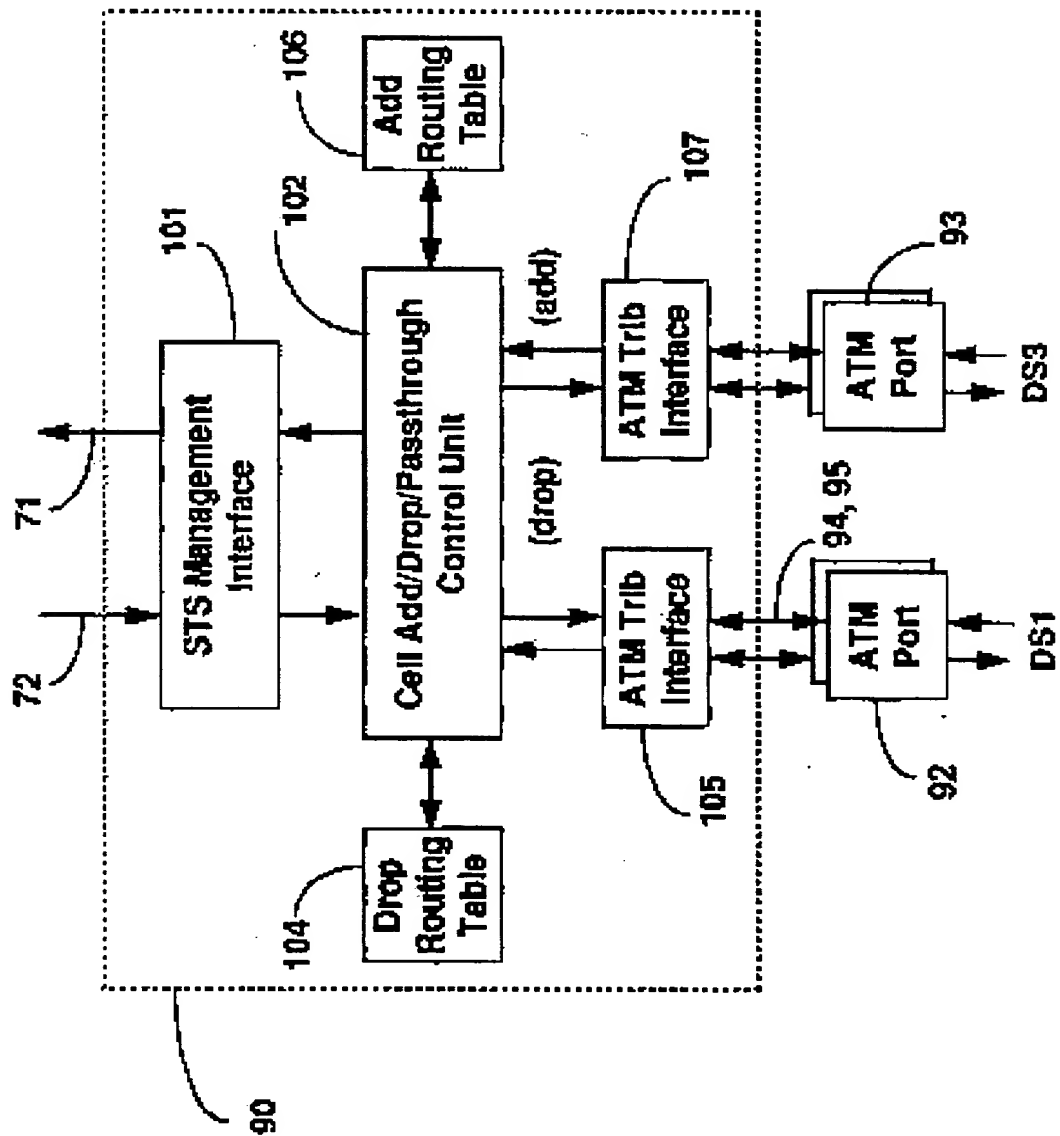


FIGURE 11


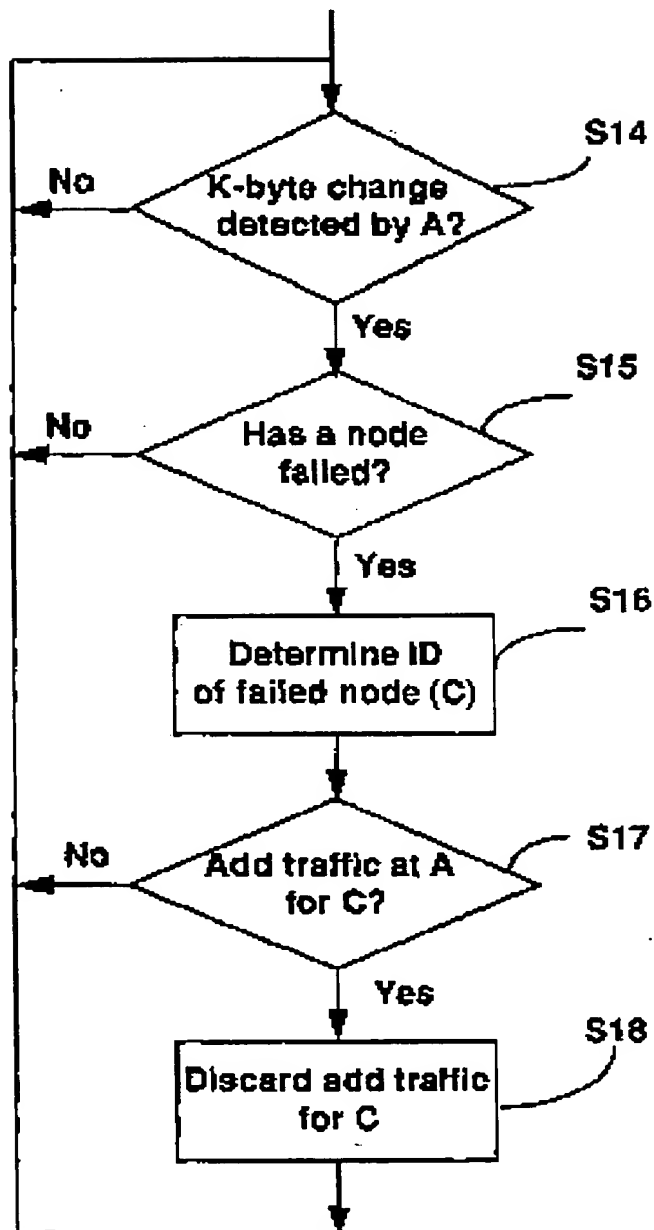


FIGURE 12

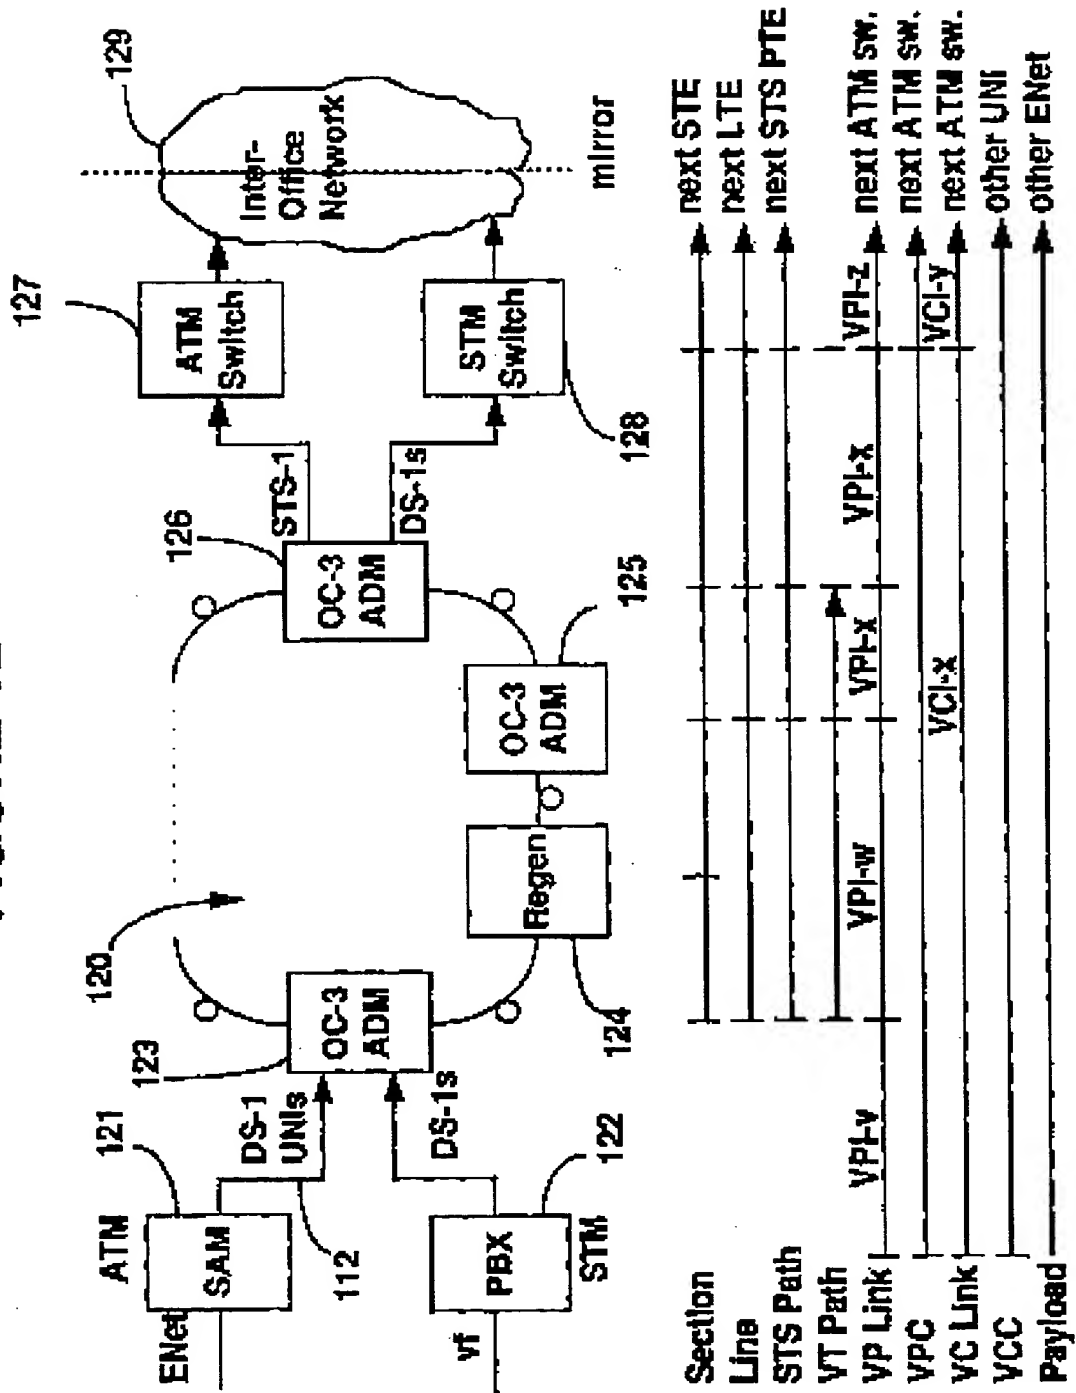

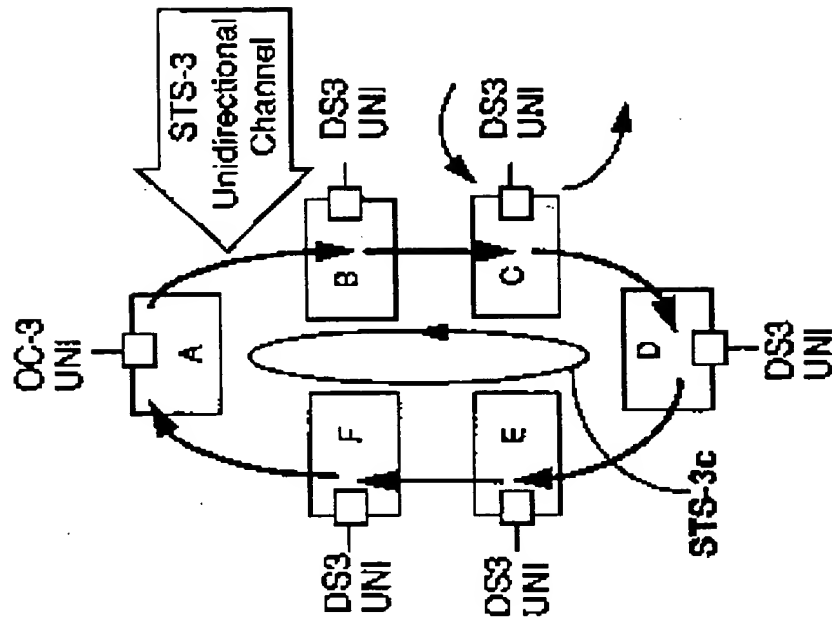


FIGURE 13B


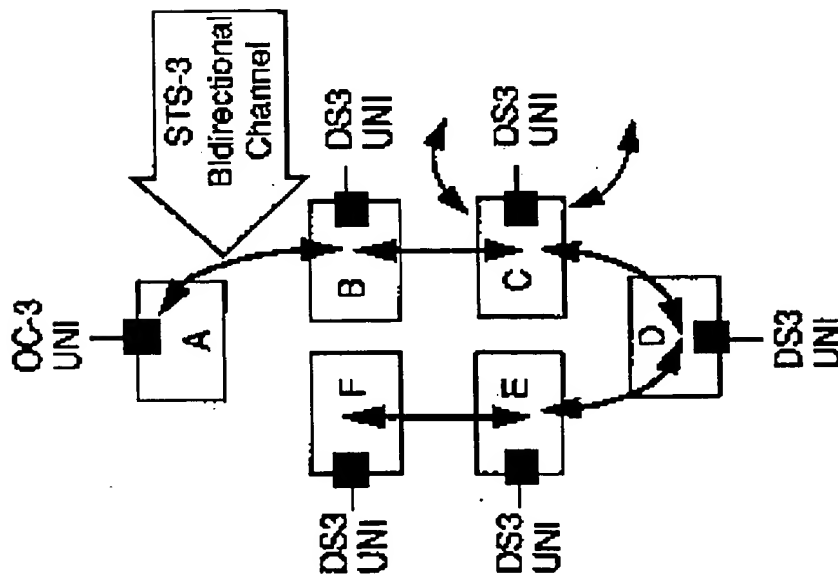


FIGURE 13A

This Page Blank (uspto)



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 818 940 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
16.08.2000 Bulletin 2000/33

(51) Int. Cl.⁷: H04Q 11/04, H04L 12/437

(43) Date of publication A2:
14.01.1998 Bulletin 1998/03

(21) Application number: 97111631.4

(22) Date of filing: 09.07.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV RO SI

(30) Priority: 11.07.1996 US 21575 P
16.01.1997 US 783869

(71) Applicant:
NORTEL NETWORKS CORPORATION
Montreal, Quebec H2Y 3Y4 (CA)

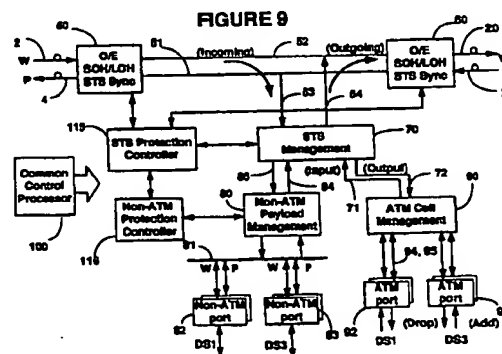
(72) Inventors:
• Ellis, Donald Russell
Ottawa, Ontario K2C 2P6 (CA)

• Allen, Brent E.
Nepean, Ontario K2G 6A4 (CA)
• Martin, David Wright
Nepean, Ontario K2J 1R3 (CA)
• Sokolowski, Edward Ryszard
Ontario K2L 2E3 (CA)
• McEachern, Patrick M.
Nepean, Ontario K2J 4C1 (CA)

(74) Representative:
Berkson, Michael David et al
Nortel Networks
Intellectual Property Law Group
London Road
Harlow, Essex CM17 9NA (GB)

(54) Self-healing line switched ring for ATM traffic

(57) The invention provides for a method for transporting a SONET/SDH formatted asynchronous transfer mode (ATM) signal and/or a synchronous transfer mode (STM) signal on a line switched ring over a unidirectional path. The SONET formatted ATM signal comprises cells mapped into a STS-Mc or m×STS-1s while the STM signal comprises STS-1s/VTs mapped STS-W. A unidirectional line switched ring is provided for transporting the STM STS-W using a unidirectional path switched protection protocol and the ATM STS-Mc using a unidirectional line switched protection protocol. A ring node comprises input and output ring interfaces, an STS management block, an ATM cell management block, and a non-ATM payload management block. The STS management block routes the traffic to the ATM cell management block and to the non-ATM payload management block, according to the traffic type. The STS management block also provides the UPSR protection for the STS-1s and ULSR protection for the STS-Mc. The ATM cell management block maps the add ATM cells received from the ATM ports into the STS-Mc signal, and delineates the cells from the STS-Mc to present them to the ATM ports. The non-ATM payload management block routes STM VTs or STS-1s to/from the non-ATM ports.



EP 0 818 940 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 11 1631

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|--|---|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.6) |
| X | HERSEY S H ET AL: "ARCHITECTURES AND APPLICATIONS OF SONET IN A SELF-HEALING NETWORK" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON COMMUNICATIONS,US,NEW YORK, IEEE, vol. -, page 1418-1424 XP000277559 ISBN: 0-7803-0006-8 | 1 | H04Q11/04 H04L12/437 |
| Y | * figures 5A,5B * | 2-4 | |
| A | * page 1420, right-hand column, line 65 - page 1421, left-hand column, line 12 * | 5,6 | |
| Y | SOSNOSKY J ET AL: "A CURRENT BELLCORE VIEW OF SONET ATM VP RINGS" IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE (GLOBECOM),US,NEW YORK, IEEE, page 39-44 XP000621452 ISBN: 0-7803-2510-9 * figure 1 * | 2-4 | |
| | * page 39, right-hand column, line 27 - page 40, left-hand column, line 5 * | | TECHNICAL FIELDS SEARCHED (Int.Cl.6) |
| | * page 40, right-hand column, line 24 - line 31 * | | H04Q H04J |
| | * page 42, right-hand column, line 23 - line 32 * | | |
| A | DRAKE J V: "A REVIEW OF THE FOUR MAJOR SONET/SDH RINGS" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON COMMUNICATIONS (ICC),US,NEW YORK, IEEE, vol. -, 1993, pages 878-884, XP000371207 ISBN: 0-7803-0950-2 * figure 5 * | 7 | |
| | * page 880, right-hand column, line 39 - page 881, left-hand column, line 37 * | | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 13 June 2000 | Examiner Scalfa, A |
| CATEGORY OF CITED DOCUMENTS | | T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : technological background O : non-written disclosure P : intermediate document & : member of the same patent family, corresponding document | |
| X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category | | | |

EPO FORM 1503 (03.82) (P04/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 11 1631

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|--|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.6) |
| A | BARBARA ENGEL SMITH ET AL: "SONET BIDIRECTIONAL RING CAPACITY ANALYSIS: A PRAGMATIC VIEW" INTERNATIONAL CONFERENCE ON COMMUNICATIONS (ICC), US, NEW YORK, IEEE, vol. -, 1994, pages 489-493, XP000438963 * figure 6 * * page 489, left-hand column, line 15 - line 43 * * page 490, right-hand column * | 17 | TECHNICAL FIELDS SEARCHED (Int.Cl.6) |
| A | KREMER W: "SONET RINGS AND VIDEO: A PERFECT FIT" TELEPHONY, US, CHICAGO, IL, vol. 228, no. 4, 23 January 1995 (1995-01-23), page 30, 34, 36 XP000560978 ISSN: 0040-2656 * figure 2 * * page 34, right-hand column, line 7 - page 36, middle column, line 6 * | 17 | |
| A | WU T -H ET AL: "AN ECONOMIC FEASIBILITY STUDY FOR A BROADBAND VIRTUAL PATH SONET/ ATM SELF-HEALING RING ARCHITECTURE" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, US, IEEE INC. NEW YORK, vol. 10, no. 9, 1 December 1992 (1992-12-01), pages 1459-1472, XP000458647 ISSN: 0733-8716 * figure 4 * * page 1461, right-hand column, line 43 - page 1462, right-hand column, line 8 * -/- | 18, 21 | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 13 June 2000 | Examiner Scalia, A |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p> | | | |

EPO FORM 1503 03 02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 11 1631

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|--|---|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.6) |
| A | <p>TSONG-HO WU ET AL: "FEASIBILITY STUDY OF A HIGH-SPEED SONET SELF-HEALING RING ARCHITECTURE IN FUTURE INTEROFFICE NETWORKS"</p> <p>IEEE COMMUNICATIONS MAGAZINE, US, IEEE SERVICE CENTER, PISCATAWAY, N.J, vol. 28, no. 11, 1 November 1990 (1990-11-01), pages 33-42, 51, XP000172949</p> <p>ISSN: 0163-6804</p> <p>* figure 4 *</p> <p>-----</p> | 21 | |
| | | | TECHNICAL FIELDS SEARCHED (Int.Cl.6) |
| | | | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 13 June 2000 | Examiner Scalia, A |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p> | | | |

EPO FORM 1503 03/82 (P04C01)



European Patent
Office

Application Number

EP 97 11 1631

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 97 11 1631

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-6

A method for communicating information over a ring comprising an ATM STS-Mc incoming signal

2. Claims: 7-16

A method for communicating information over a unidirectional ring with a first direction of transmission and a second direction of transmission being opposite to the first direction of transmission

3. Claim : 17

A method for communicating information over a bidirectional ring deployed in a homing configuration, comprising a first signal with bandwidth $K \times BW$ transmitted along a first transmission line and a second signal with bandwidth BW transmitted along a second transmission line

4. Claims: 18-22

A node comprising an STS management block and an ATM cell management block

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspro)